


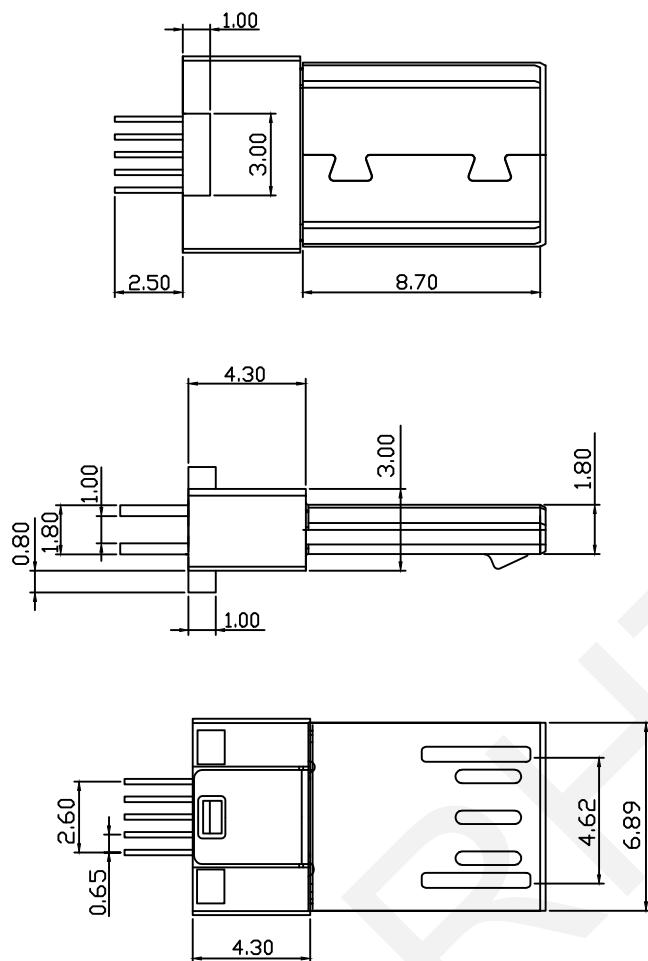

Material

Housing: High Temperature Thermoplastic
with g.f, UL94V-0.

Contact: Copper Alloy, $t=0.20\text{mm}$

Shell: SUS, $t=0.20\text{mm}$.

Electrical:

Current Rating: 1A Max.

Dielectric Withstanding Voltage:
100 V AC for 1 min.

Contact Resistance: $50\text{m}\Omega$ Max

Insulation Resistance: $100\text{M}\Omega$ Min.

Total Mating Force: 3.57 kgf Max.

Total Unmating Force: 1.0 kgf Min.

Temperature Range: -30°C Up To $+80^{\circ}\text{C}$

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN PLUG MICRO USB TYPE B CLIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY36-5M7-B