




Material

Housing: High Temperature Thermoplastics

UL94V-0 LCP, Black.

Contact: C2680/C5191.

Shell: Steel.

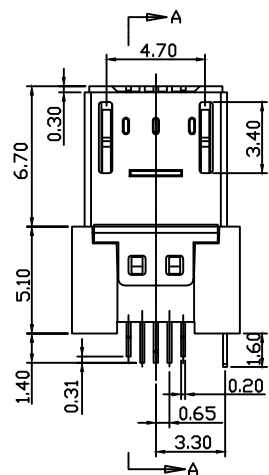

Finish: Contact: Plated Gold In Mating Area,

Tin Lead On Solder Tails

Shell: Tin Lead Plating

Electrical: Contact Resistance: 30mΩ Max.

Dielectric Withstanding Voltage:

50 V AC AT Sea Level

Insulation Resistance: 100MΩ Min.

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN PLUG MICRO USB TYPE B CLIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY36-5M8-B