



1 2 3 4 5 6 7 8 9



A

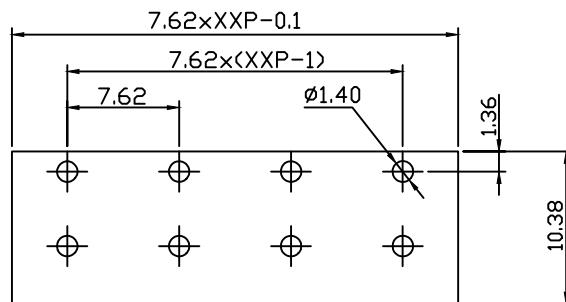

Recommended PCB Layout

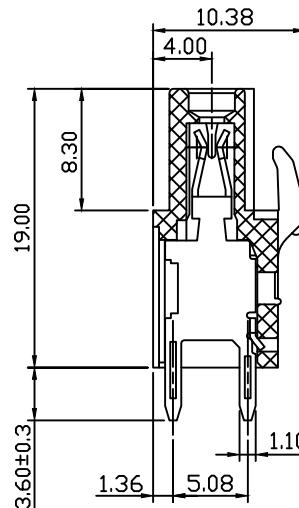

2P only has this  
card hook

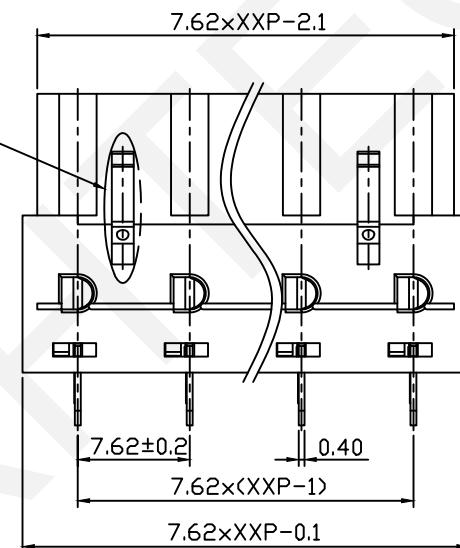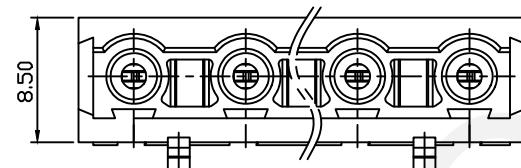

#### Material

Housing:PA66.UL94V-0  
Clamp:Copper Alloy,Sn Plated  
Temp.Range:-40°C~+105°C  
Soldering:+250°C For 5Sec

#### Order Information

RHTBYDKH-7.62-XXP-X

Terminal Block

Pitch:7.62mm

No.of(02~16)Pin

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	13.5A
Withstand Voltage	AC2000V/1min	---



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120 CHK'D BY FENG

±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

Pitch 7.62mm Terminal Block



RHTBYDKH-7.62-XXP-X

1 2 3 4 5 6 7 8 9