
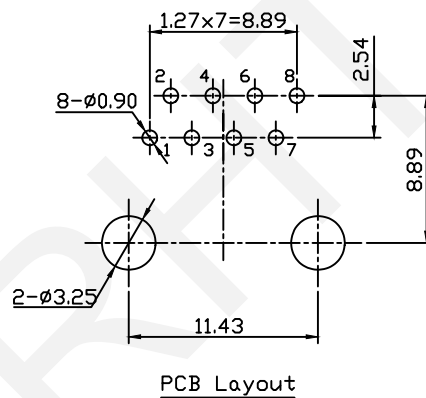
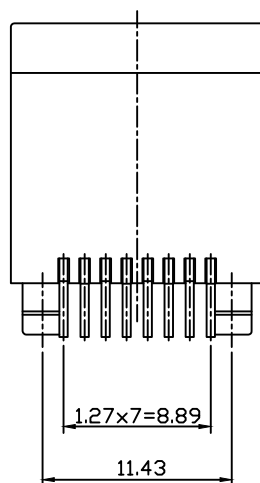
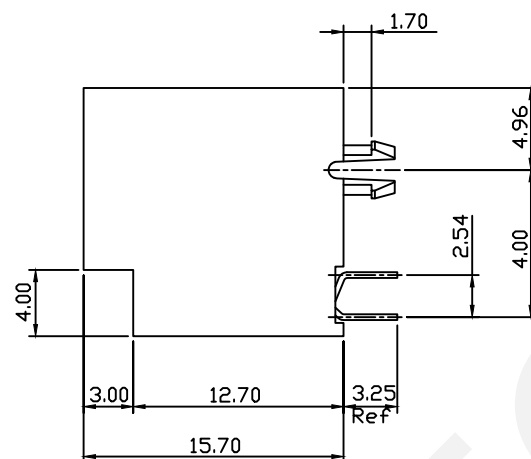


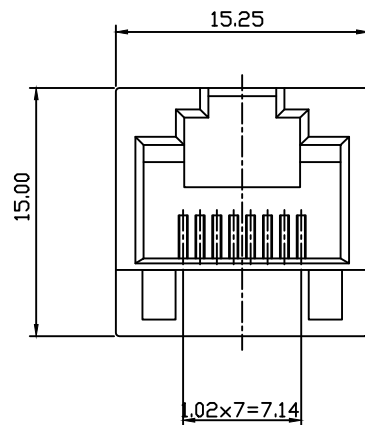

Material:
Housing: Engineering Thermoplastic
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze
Plating: Gold Plating Over Nickel in Contact
Tin Plating Over Nickel in Solder Area.
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 40mΩ Max.
Insulation Resistance: 1000MΩ Min. @500VDC
Dielectric Strength: 1000VAC Rms 60Hz, 1 Min.
Durability: 750 cycles Min.
Operation Temperature: -20°C ~ +75°C

Order Information
RHTLY52-8P8C-S-1-XX

Contacts: 8P8C
Color Code: 1-Black
Plating Code:
01-Fu' Gold Plating
02-3u' Gold Plating
03-6y' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

RJ45-8P8C Vertical Modular jacks

THIRD ANGLE PROJECTION



RHTLY52-8P8C-S-1-XX