

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

A

B

B

C

C

D

D

E


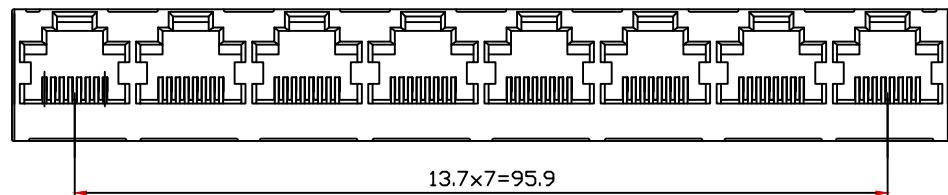
E

F

F

G

G


Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

 Contacts: Phosphor Bronze $\varnothing 0.46$ mm

Plating: Gold Plating

Shield: Brass, Tin Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

 Contact Resistance: 30m Ω Max.

 Insulation Resistance: 500M Ω Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C ~ +70°C

Order Information

RHTLY58-8P8C-W-1x8-1-XX

Contacts: 8P8C

Shield: W-with Shield

Shield Peg Code:

1-Front 3.05mm

Plating Code:

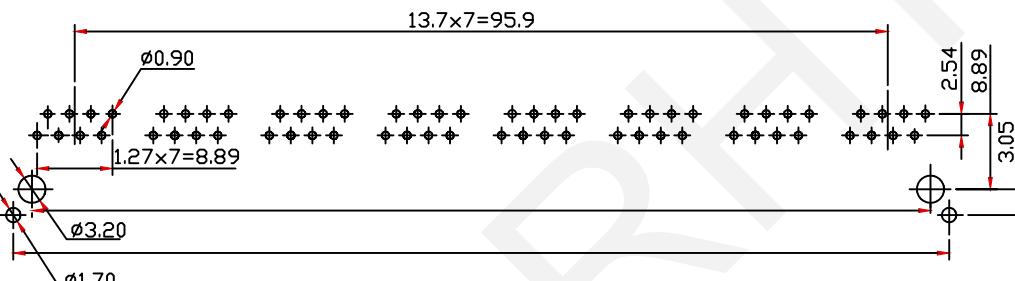

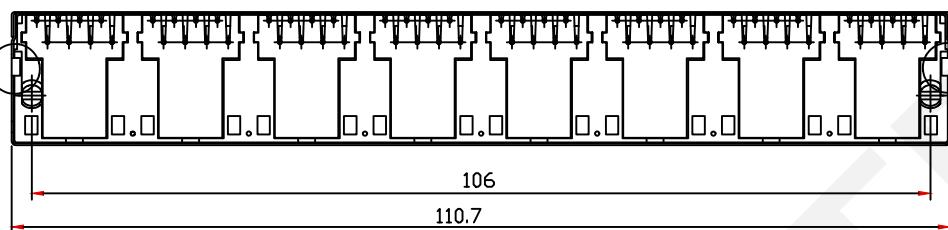
01-Fu' Gold Plating

02-3u' Gold Plating

03-6u' Gold Plating

04-15u' Gold Plating

05-30u' Gold Plating


PCB Layout


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APP'D BY ZHAN
±0.12	±0.15	±0.3	±0.5		

1x8 RJ45-8P8C Modular jack with SHELL,Front 3.05mm



RHTLY58-8P8C-W-1x8-1-XX

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---