




PCB Layout

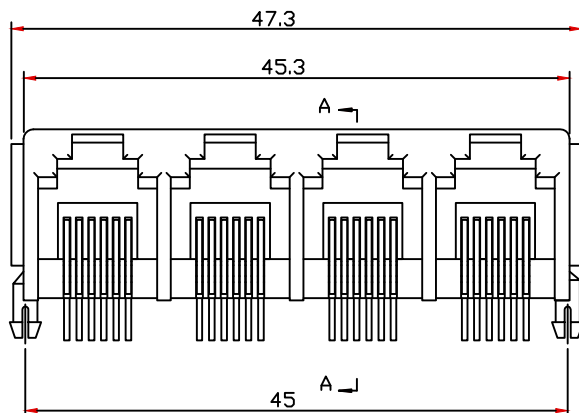

with Panel



SECTION A-A

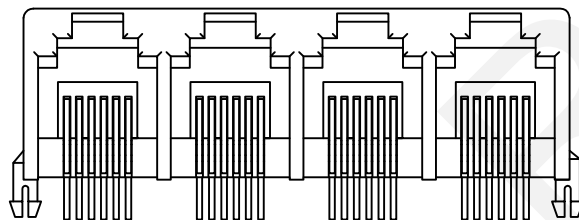

without Panel

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ $+70^{\circ}\text{C}$

Order Information
RHTLY27-6P6C-1X4-W-X-XX


Contacts: 6P6C
Panel: W-with Panel
W/O-without Panel
Color Code:
1-Black 2-Gray
Plating Code:
01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

RJ12-6P6C 1x4 Modular jacks

THIRD ANGLE PROJECTION



RHTLY27-6P6C-1X4-X-X-XX