

1 2 3 4 5 6 7 8 9

A


B

C

D

E

F

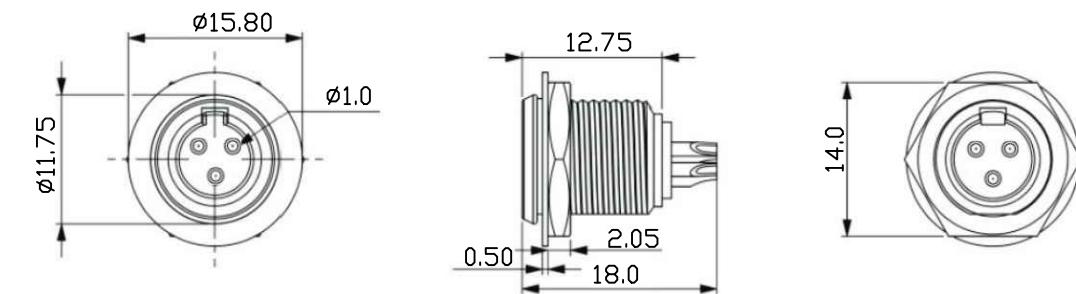

Electrical Specification:

Rated current / voltage: 3A 125VA

The contact resistance: 5mΩMax

Insulation Resistance: 500VDC 1000MΩmin

The test voltage: 1000 VDC 1Min

The ambient temperature: -30°C~100°C

The life of the product: 5000

Diameter: Ø2 ~Ø5mm

Material:

Contact material: gold-plated copper

Insulator material: PA66,of PBT

Connector Body Material: Metal

Product NO.: RHTAYLR-P01B-03

XLR Jack series

03=3PIN or 4PIN,5PIN



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Mini XLR Plug&Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYLR-P01B

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G