

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A

B



C

D

E

F

G

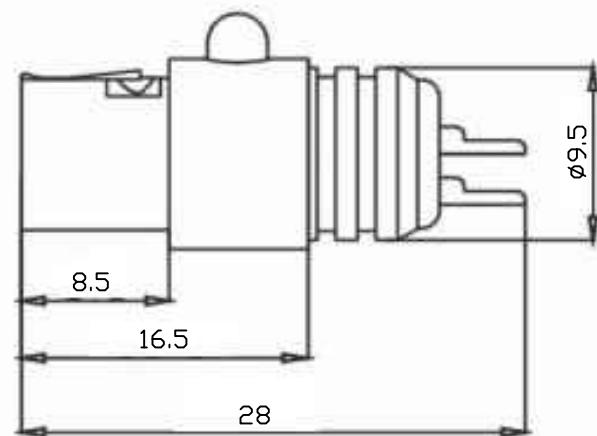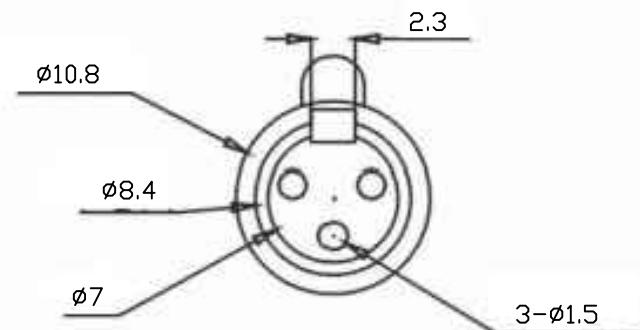

Electrical Specification:

Rated Current/Voltage: 3A 250VA

The Contact Resistance: 5mΩMax

Insulation Resistance: 500VDC 1000MΩmin

The Test Voltage: 1000 VDC 1Min

The Ambient Temperature: -30°C~100°C

The Life Of The Product: 5000

Diameter: Ø2~ Ø5mm

Material:


Contact Material: Gold-plated Copper

Insulator material: PA66, or PBT

Connector Body Material: Metal

Order Information:

RHTAYLR-P01D-03



XLR Jack Series.

03=3PIN

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Mini XLR Plug&Socket


0~3

3~18

18~50

50~120

CHK'D BY FENG



±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

RHTAYLR-P01D

1

2

3

4

5

6

7

8

9