



1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

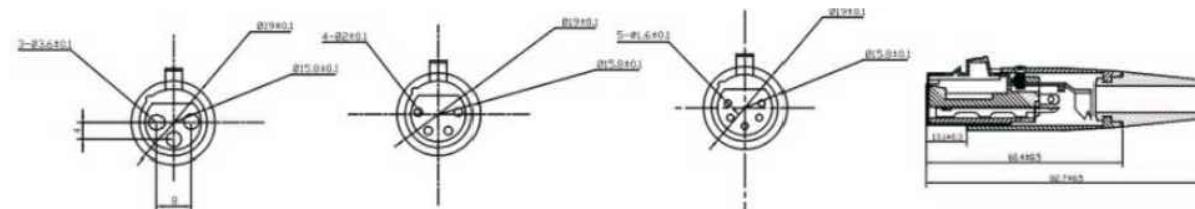

B

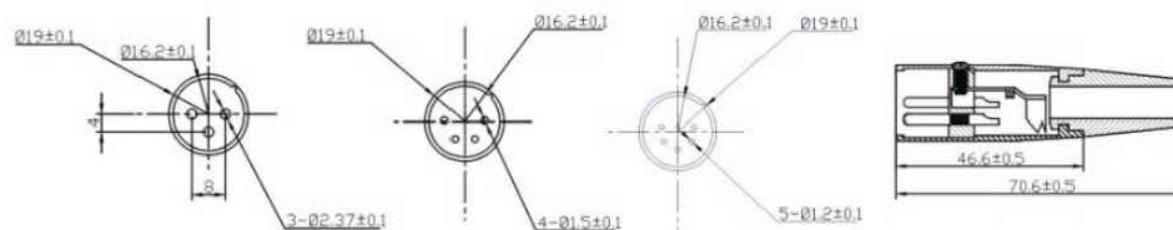

C

Electrical Specification:

Number of contacts: 3

Contact Resistance: $\leq 3 \text{ m}\Omega\text{hms}$

Insulation Resistance Initial: $> 2 \text{ G}\Omega\text{hms}$

After Damp Heat Test: $> 1 \text{ G}\Omega\text{hms}$

Dielectric Strength: 1500 V dc

Rated current: 16 A

Mechanical Lifetime: >1000 cycles

Insertion/Withdrawal Force: $\leq 20 \text{ N}$

Cable D.D. Range: 4.0mm-8.0mm

Temperature Range: -30°C to 80°C

ORDER INFORMATION

Product NO.: RHTAYLR-P13-03-F-B

XLR Jack series

03=3PIN of 03=07PIN

F=Female M=Male

R=Red B=Black W=White

D

E

F

A

B

C

D

E

F

G

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APPR BY ZHAN
±0.12	±0.15	±0.3	±0.5		

XLR Plug



RHTAYLR-P13-03-F-B

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---