

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

A

B


C

D

E

F

G

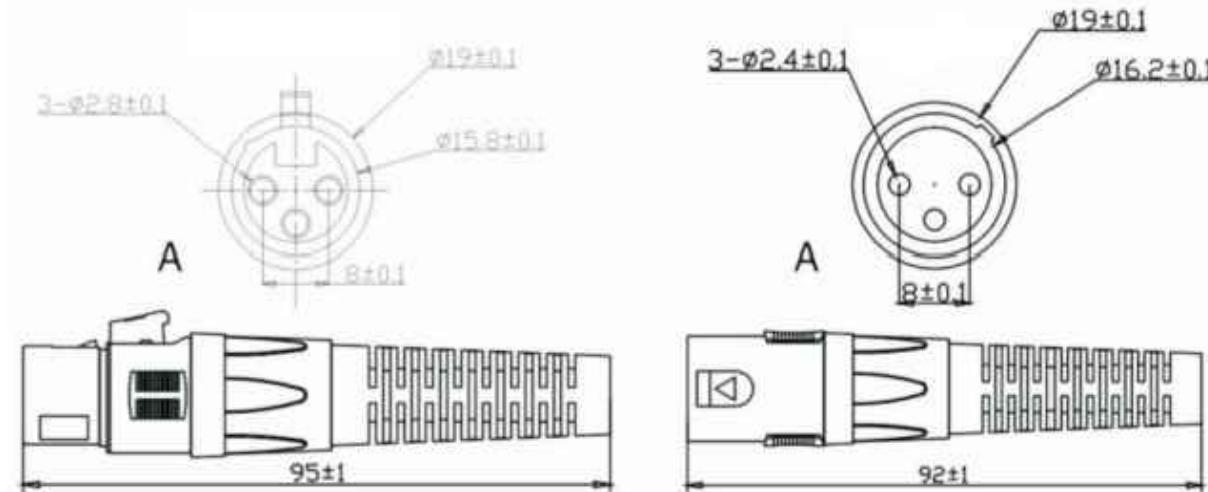

Electrical Specification:

Number of contacts: 3
 Contact resistance: $\leq 5\text{m}\Omega$,
 Insulation resistance: $\geq 5000\text{M}\Omega$
 Voltage: 1400V
 Axial fixity: $\geq 100\text{N}$
 Foot separation force: $85\pm 5\text{g}$
 Insertion force: $10\text{--}80\text{N}$

ORDER INFORMATION

Product NO.: RHTAYLR-P14-03-F-B

XLR Jack series

03=3PIN of 03=07PIN

F=Female M=Male

R=Red B=Black W=White

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Plug

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYLR-P14-03-F-B

1

2

3

4

5

6

7

8

9