


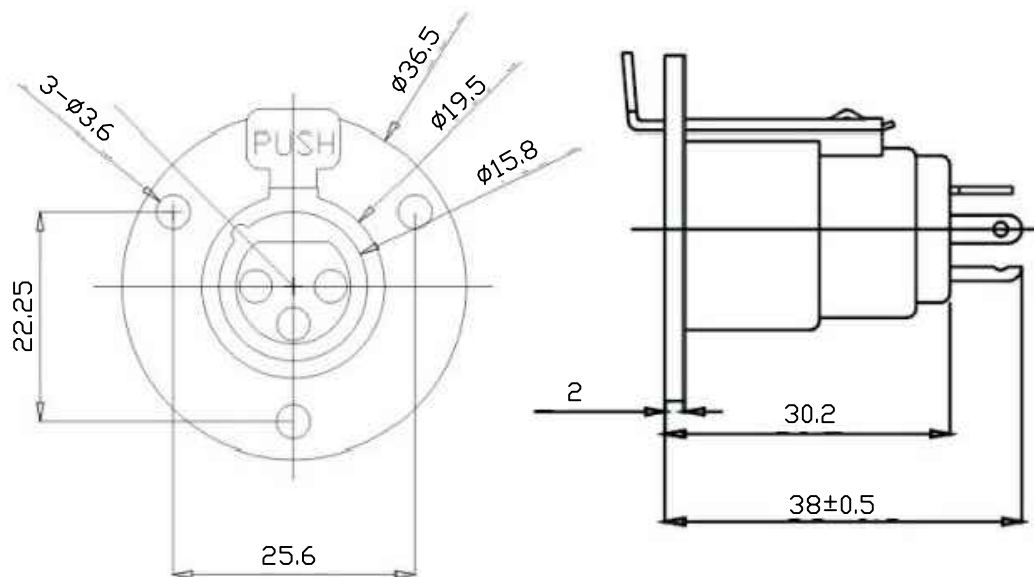

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S06-03-F-S

XLR Jack Series.

03=3PIN

F=Female

S=Dip Straight Pin

R=Dip Right Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG


APPR BY ZHAN

XLR Socket

THIRD ANGLE PROJECTION



RHTAYLR-S06-03-F-S

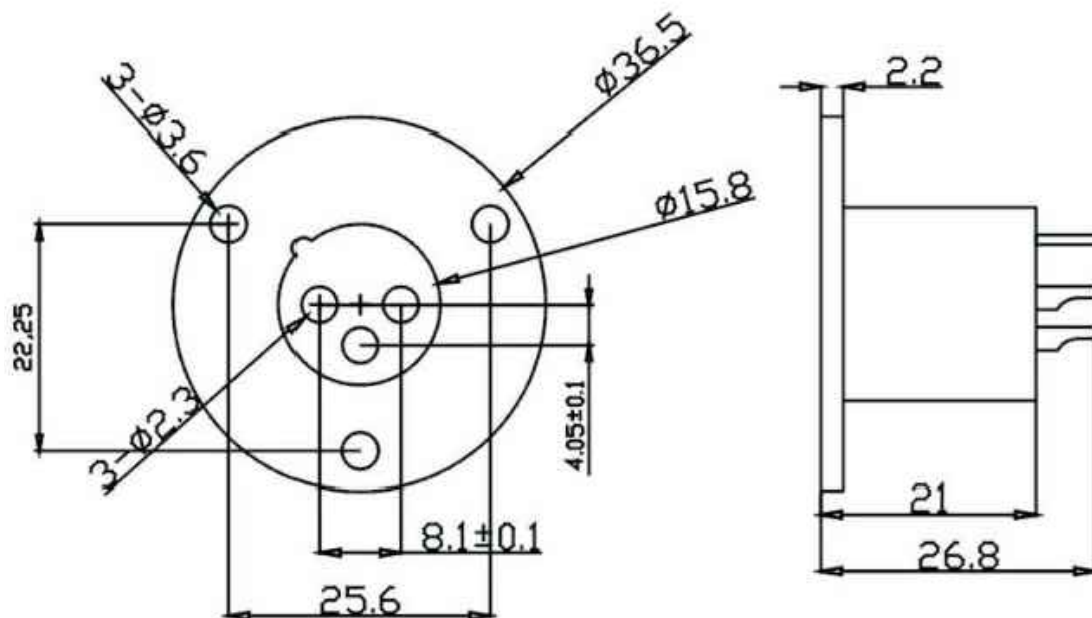

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S06-03-M-S

XLR Jack Series.

03=3PIN

M=Male

S=Solder Type Straight Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---	
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

DRWN BY PAN

XLR Socket

THIRD ANGLE PROJECTION



RHTAYLR-S06-03-M-S