





	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	XLR Socket THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9

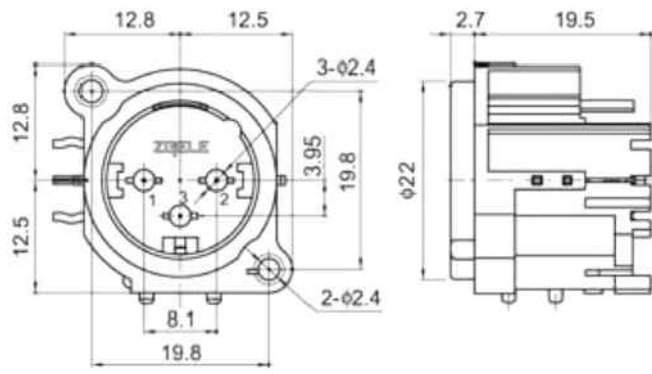

PCB LAYOUT
(VIEWED FROM COPPER SIDE)



SCHEMATIC LAYOUT




No Locking Pate
J Type Ground Link

Electrical Specification:
Contact Resistance: ≤ 0.03Ω
Insulation Resistance: ≥100mΩ
Withstand Voltage: 500V AC (50Hz)/minute
Rated Load: 50V DC, 1A
Insertion And Extraction Force: 4-40N
Temperature Range: -30℃ to+80℃


Order Information:

RHTAYLR-S10-03-M-R1-W-N


XLR Jack Series.
03=3 Pin 05=5 Pin 07=7Pin
M=Male
R1=Dip Right Pin R1,R2,R3
N=No Ground Link Terminal
W=With Ground Link Terminal
N=No Locking W=With Locking

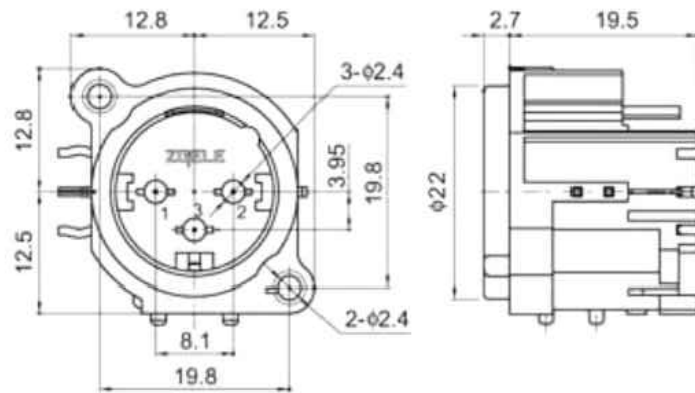

PC.B LAYOUT
(VIEWED FROM COPPER SIDE)



SCHEMATIC LAYOUT



No Locking Pate
J Type Ground Link

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S10-03-M-R2-W-N

XLR Jack Series.

03=3 Pin 05=5 Pin 07=7Pin

M=Male

R1=Dip Right Pin R1,R2,R3

N=No Ground Link Terminal

W=With Ground Link Terminal

N=No Locking W=With Locking



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYLR-S10-03-M-R2-W-N


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



1

2

3

4


5

6


7

8


9

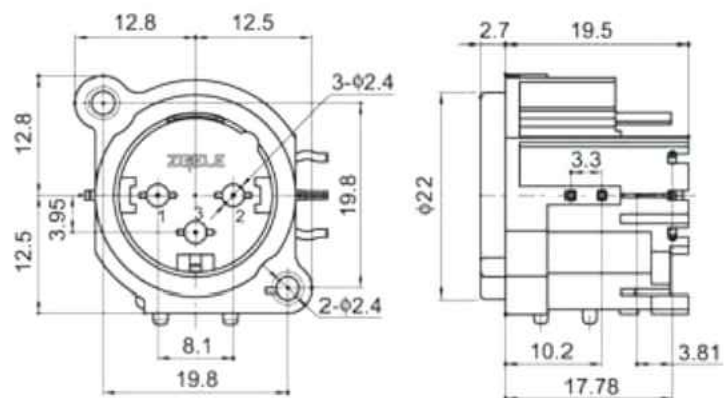

P.C.B LAYOUT
(VIEWED FROM COPPER SIDE)



SCHEMATIC LAYOUT



No Locking Pate
J Type Ground Link

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S10-03-M-R3-W-N

XLR Jack Series.

03=3 Pin 05=5 Pin 07=7Pin

M=Male

R1=Dip Right Pin R1,R2,R3

N=No Ground Link Terminal

W=With Ground Link Terminal

N=No Locking W=With Locking



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYLR-S10-03-M-R3-W-N


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9