


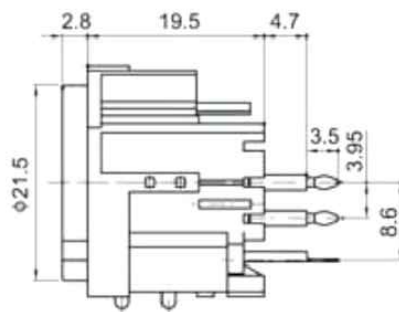


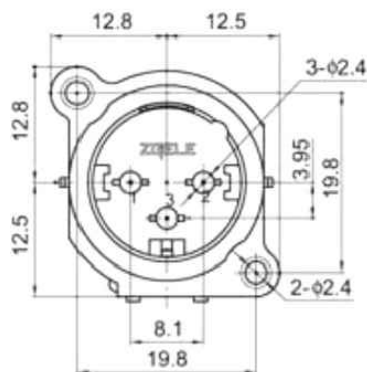

PC B LAYOUT
(VIEWED FROM COPPER SIDE)



SCHEMATIC LAYOUT



No Locking Pate
K Type Ground Link

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S11-03-M-S-W-N

XLR Jack Series.

03=3 Pin 05=5 Pin 07=7Pin

M=Male

S=Dip Straight Pin

N=No Ground Link Terminal

W=With Ground Link Terminal

N=No Locking W=With Locking



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYLR-S11-03-M-S-W-N

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



1

2

3

4



5

6


7

8


9

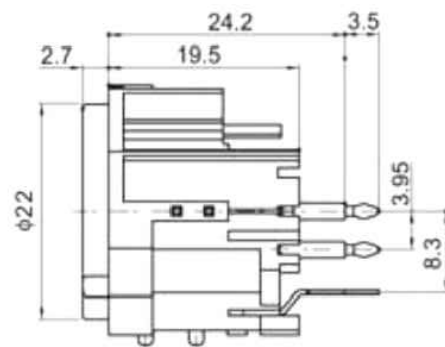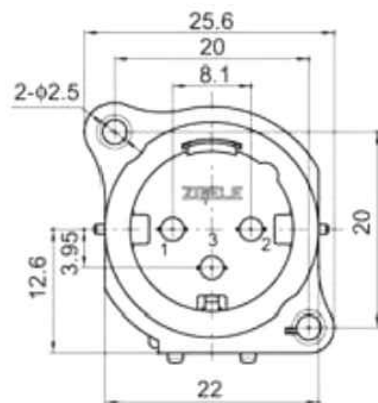

PC.B LAYOUT
(VIEWED FROM COPPER SIDE)



SCHEMATIC LAYOUT



Y Type Locking Pate
M Type Ground Link

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S11-03-M-S-W-W

XLR Jack Series.

03=3 Pin 05=5 Pin 07=7Pin

M=Male

S=Dip Straight Pin

N=No Ground Link Terminal

W=With Ground Link Terminal

N=No Locking W=With Locking



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYLR-S11-03-M-S-W-W

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9