

1

2

3

4

5

6

7

8

9

A

B

C

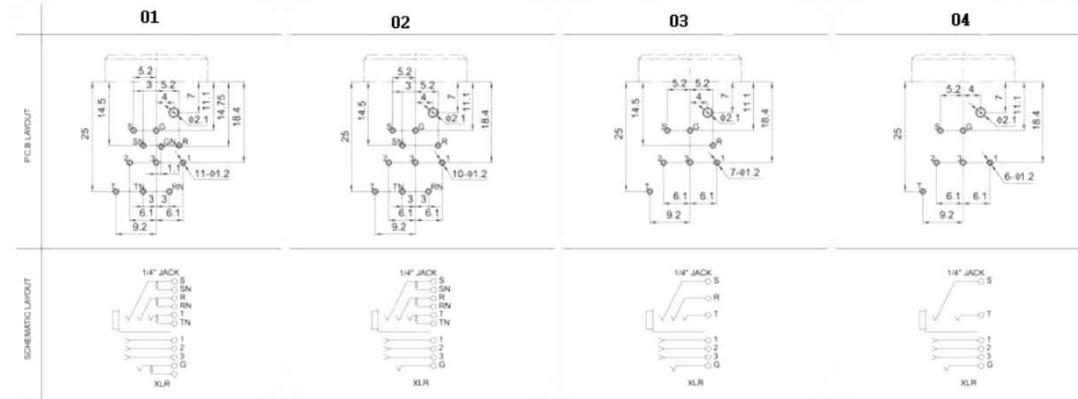
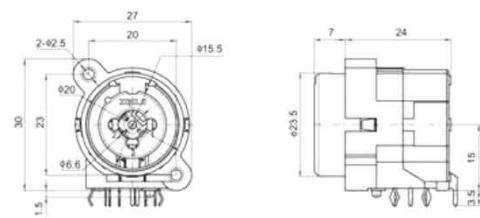
D

E

F



NINGBO RHT ELECTRONIC CO.,LTD

**Electrical Specification:**Contact Resistance:  $\leq 0.03\Omega$ Insulation Resistance:  $\geq 100M\Omega$ 

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to +80°C

**Order Information:**RHTAYLR-S13-01

XLR Jack series

01 02 03 Use this chart to

1

2

3

4

5

6

7

8

9

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

 $\pm 0.12$  $\pm 0.15$  $\pm 0.3$  $\pm 0.5$ 

APPR BY ZHAN



RHTAYLR-S13-01

A

B

C

D

E

F

G