
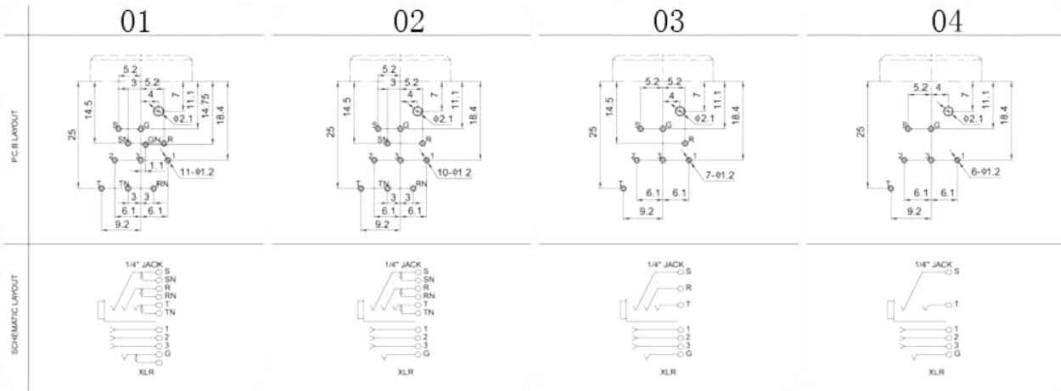



	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE:---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	XLR Socket THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9



Electrical Specification:

Contact Resistance: ≤ 0.03Ω

Insulation Resistance: ≥100mΩ

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30℃ to+80℃

Order Information:

RHTAYLR-S14-01

XLR Jack series

01 02 03 Use this chart to