


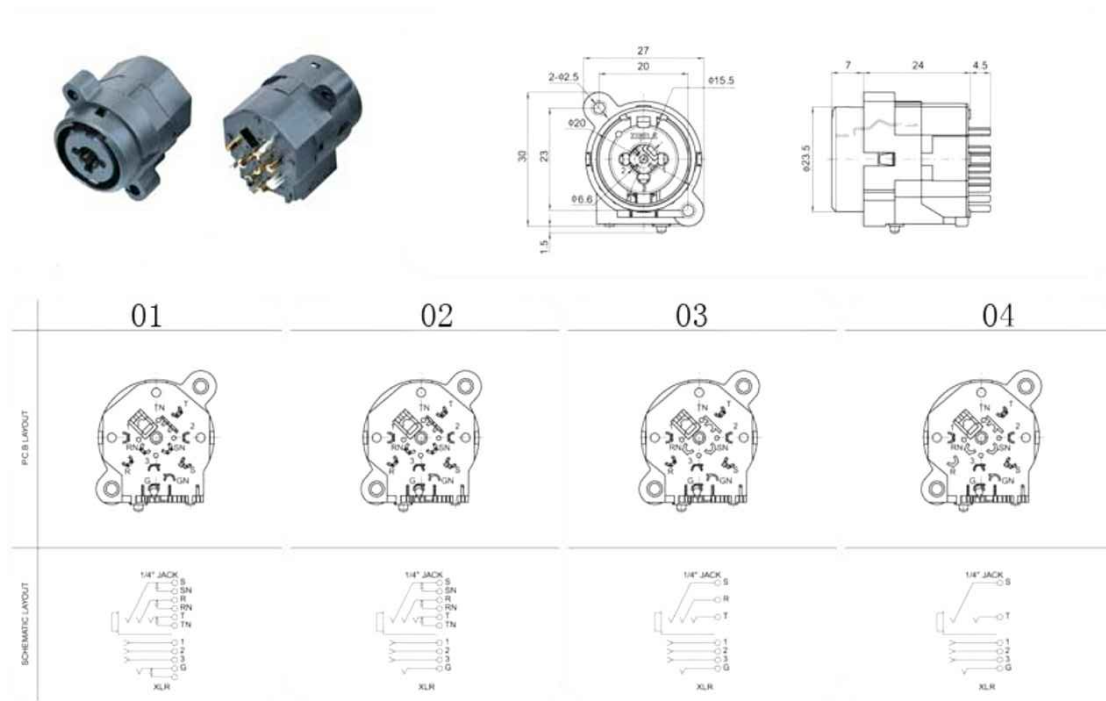

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N

Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S17-01

XLR Jack series

01 02 03 Use this chart to



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

XLR Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAYLR-S17-01