

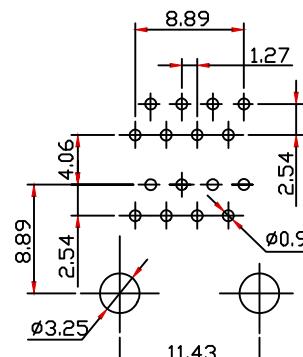
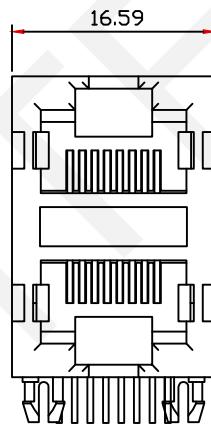


1 2 3 4 5 6 7 8 9

A

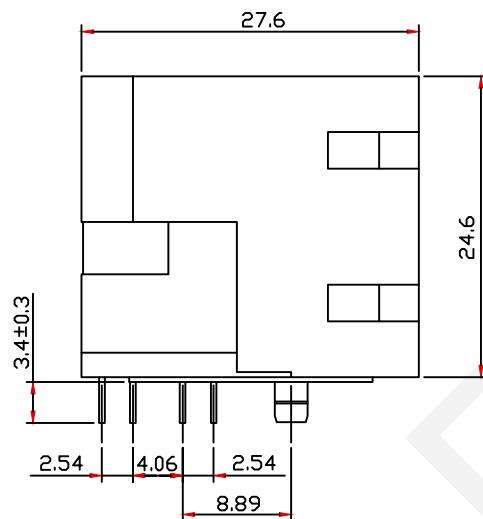

PCB Layout

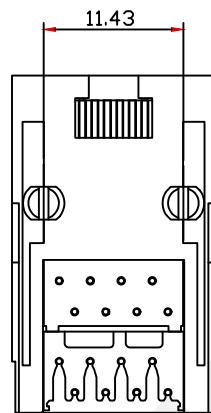

**Material:**

Housing:PBT+Glass Filled Polyester

Flammability Rating:UL94V-0

Contacts:Phosphor Bronze  $\varnothing 0.46\text{mm}$

Plating:Gold Plating

**Electrical:**

Voltage Rating:125VAC

Current Rating:1.5A

Contact Resistance:30m $\Omega$  Max.

Insulation Resistance: 500M $\Omega$  Min.

Dielectric Strength:1000VAC Rms 50Hz,1 Min.

Durability:600 cycles Min.

Operation Temperature:-40°C~+70°C

**Order Information**

RHTLY03-8P8C-2x1-XX

Contacts:8P8C

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

B

C

D

E

F

G

A

B

C

D

E

F

G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks,RJ45-8P8C  
jack, 2x1 Without Shell

0~3

3~18

18~50

50~120

CHK'D BY FENG

$\pm 0.12$

$\pm 0.15$

$\pm 0.3$

$\pm 0.5$

APPR BY ZHAN



RHTLY03-8P8C-2x1-XX

1

2

3

4

5

6

7

8

9