

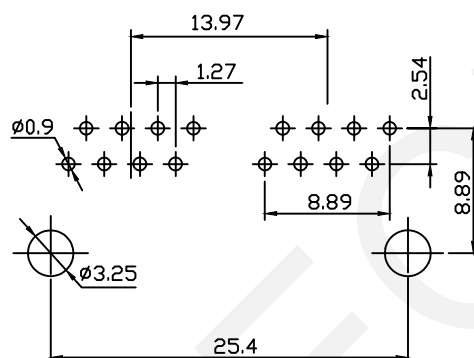
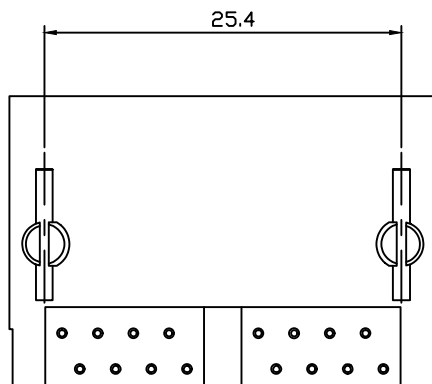


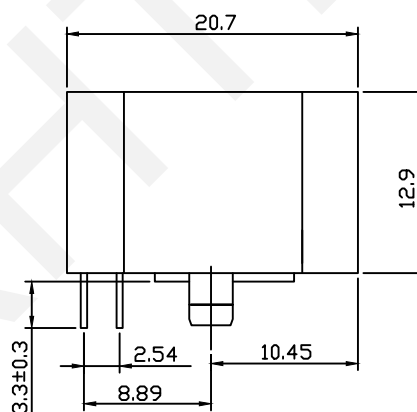

PCB Layout

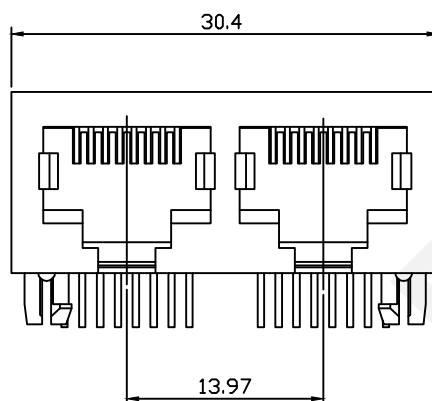

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\phi 0.46\text{mm}$
Plating:Gold Plating

Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information
RHTLY23-8P8C-1x2-1-XX

Contacts:8P8C
Color Code:1-Black
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

RHTECP[®] NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks RJ45-8P8C 1x2 without Shield

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTLY23-8P8C-1x2-1-XX