

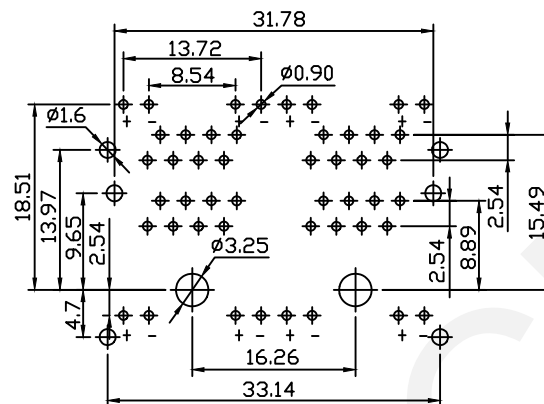
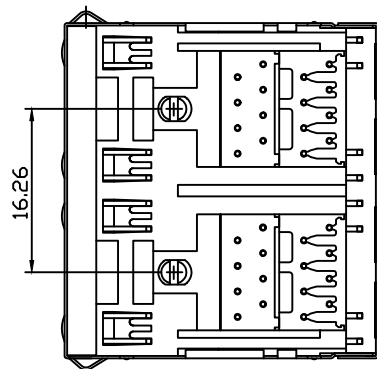


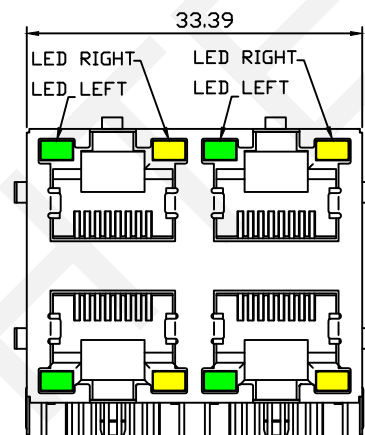

PCB Layout

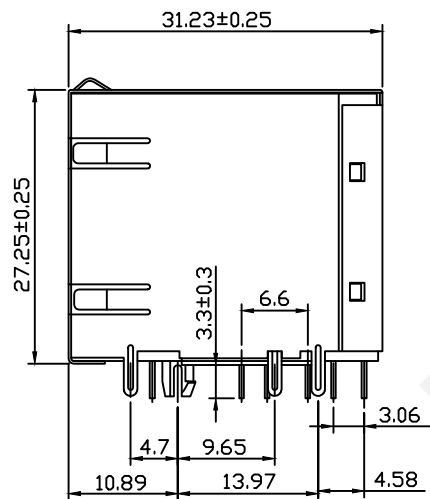

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating:Gold Plating
Shield:Brass, Tin Plating

Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ +70 $^{\circ}\text{C}$

Order Information
RHTLY13-8P8C-2x2-X-G/Y-XX

Contacts:8P8C
Shield Code:
1-with Shield
2-with EMI Shield
LED Code:LEFT/RIGHT
G/Y-Green/Yellow
Y/G-Yellow/Green
Plating Code:
01-Fu' Gold Plating,02-3u' Gold Plating
03-6u' Gold Plating,04-15u' Gold Plating
05-30u' Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Modular jacks RJ45-8P8C 2x2 Jack Shield with LED	
THIRD ANGLE PROJECTION	RHTLY13-8P8C-2x2-X-X/X-XX

