

1

2

3

4

5


6

7


8

9

A

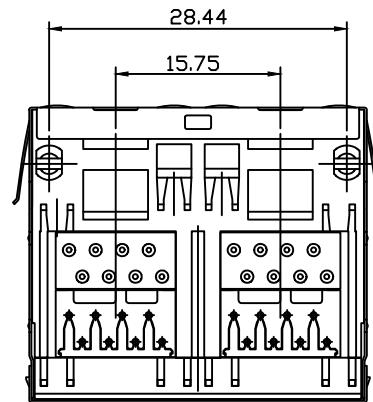


B

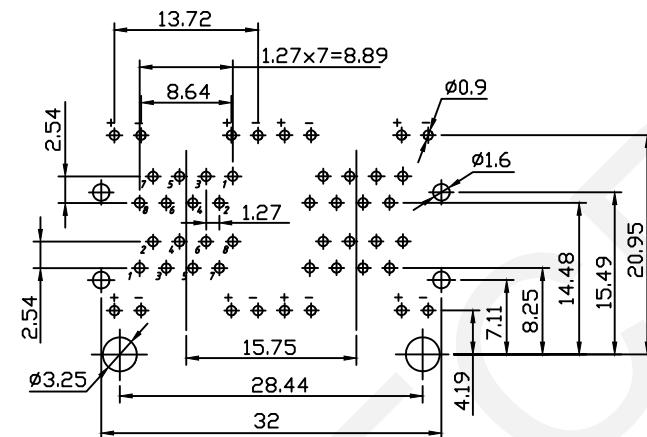


PCB Layout

C

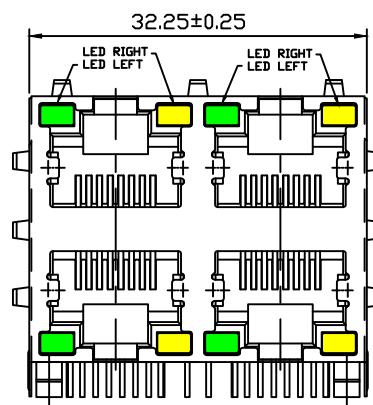

D

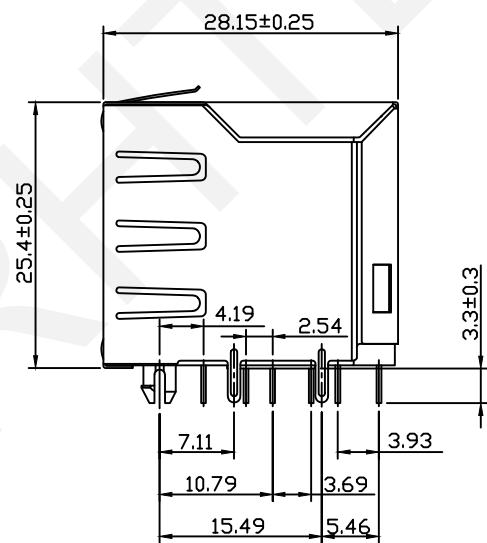

E

F

## Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze Ø0.46mm

Plating: Gold Plating

Shield: Brass, Tin Plating

## Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength: 1000VAC RMS 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C~+70°C

## Order Information

RHTLY13C-8P8C-2x2-X-G/Y-XX

Contacts: 8P8C

Shield Code: \_\_\_\_\_

1-with Shield

2-with EMI Shield

LED Code: LEFT/RIGHT

G/Y-Green/Yellow

Y/G-Yellow/Green

Plating Code: \_\_\_\_\_

01-Fu" Gold Plating, 02-3u" Gold Plating

03-6u" Gold Plating, 04-15u" Gold Plating

05-30u" Gold Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Modular jacks RJ45-8P8C  
2x2 Jack Shield with LED

RHTLY13C-8P8C-2x2-X-X/X-XX

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G