
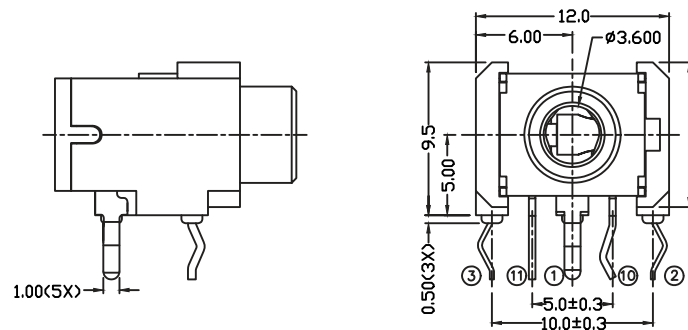
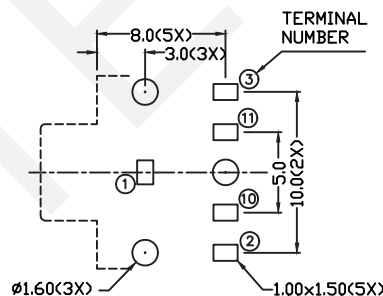


Ø3.5 MATE PLUG

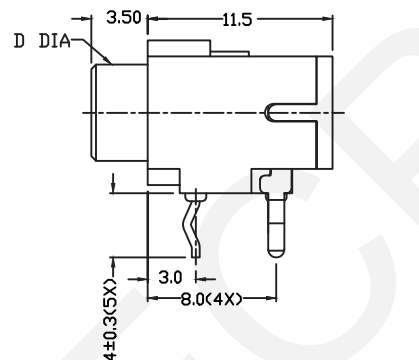

PCB LAYOUT
(TOP VIEW)

Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2~20 N

Life: 50000 Times

Operating Temperature:-30°C~70°C

Material:

Terminal 1 : Cold Rolled Steel

Terminal 2 : Copper Alloy

Terminal 3 : Copper Alloy

Terminal 10: Brass

Terminal 11: Brass

Bushing : Brass

Spring : Copper Alloy

Housing : PBT

Cover : PTB

ORDER INFORMATION

RHTAYSJ3.5-003B A

3.5mm Dip Stereo Jack

A:With NUT B:Without NUT

Schematic See Annex :

Without NUT	Ø6.0	MODEL NO	003B	003BA	003BB	003BC	003BD
D DIA		SCHEMATIC					

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYSJ3.5-003B

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN