
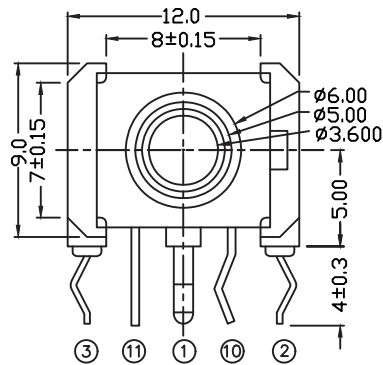
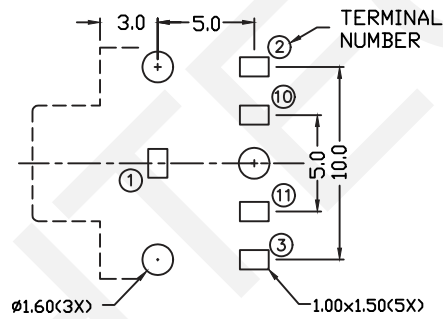


Ø3.5 MATE PLUG

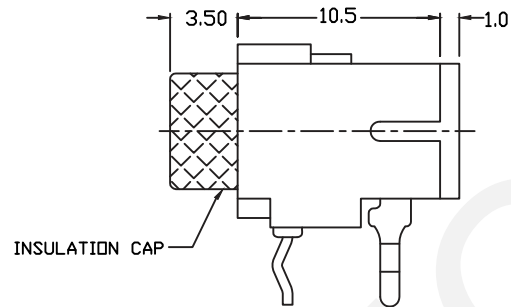

PCB LAYOUT
(BOTTOM VIEW)

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2~20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Housing/Cover/Insulation Cap:PBT
 Center Pin Material:
 Terminal 1 :Cold Rolled Steel
 Terminal 2,3 :Copper Alloy
 Terminal 10,11,Bushing :Brass
 Spring :Stainless Steel

ORDER INFORMATION

RHTAYSJ3.5-003CA

3.5mm Dip Stereo Jack
 Schematic:See Annex

MODEL NO	003C	003CA	003CB	003CC	003CD
SCHEMATIC					

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG	APPR BY ZHAN
---------------	--------------

Dip Stereo Jack	
THIRD ANGLE PROJECTION 	RHTAYSJ3.5-003C