

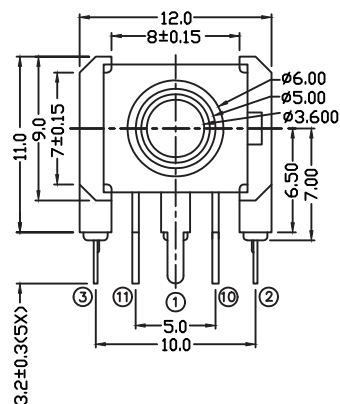


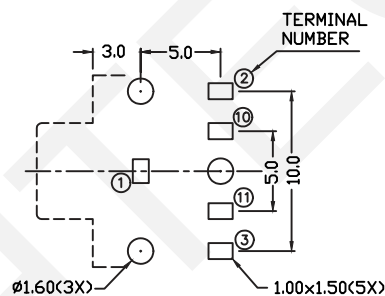

Ø3.5 MATE PLUG

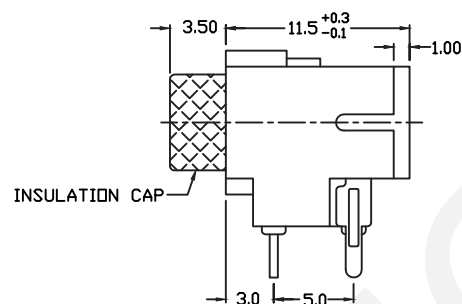

PCB LAYOUT
(BOTTOM VIEW)

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2~20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Housing/Cover/Insulation Cap:PBT
 Center Pin Material:
 Terminal 1 :Cold Rolled Steel
 Terminal 2,3 :Copper Alloy
 Terminal 10,11,Bushing :Brass
 Spring :Stainless Steel

ORDER INFORMATION

RHTAYSJ3.5-003DA

3.5mm Dip Stereo Jack
 Schematic:See Annex

MODEL NO	003D	003DA	003DB	003DC	003DD
SCHEMATIC					

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYSJ3.5-003D