





	1	2	3	4	5	6	7	8	9		
A										A	
B										B	
C										C	
D										D	
E										E	
F										F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Push Button Switch Series			G
	1	2	3	4	5	6	7	8	9		

	0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	RHTGYBS-016
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

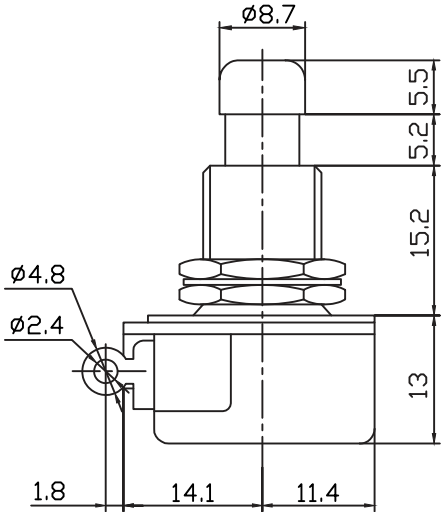

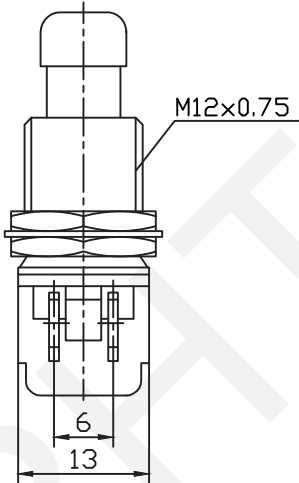

Circuitry



ON-<OFF>

ELECTRICAL

Rating: 4A 125V AC ,2A 250V AC

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ/500VDC Min


Withstanding Voltage: AC1000V/1Min

Operating Temperature: -25°C~+85°C

Electrical Life: 50000 Cycles

ORDER INFORMATION

Product NO: RHTGYBS-016 X







Push Button Switch Series

Function:B=ON-OFF

C=ON-<OFF> D=OFF-<ON>

Mounting



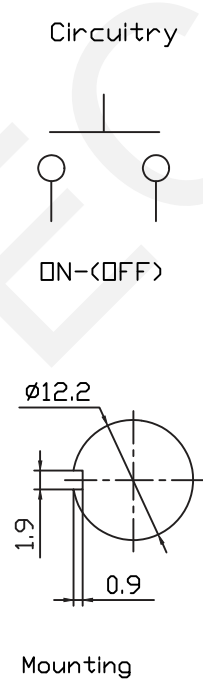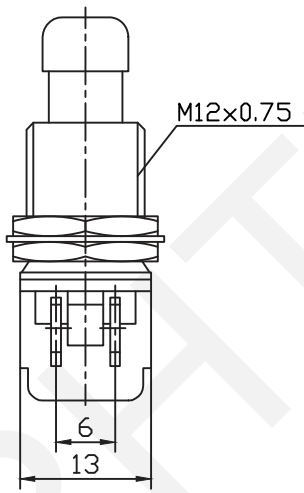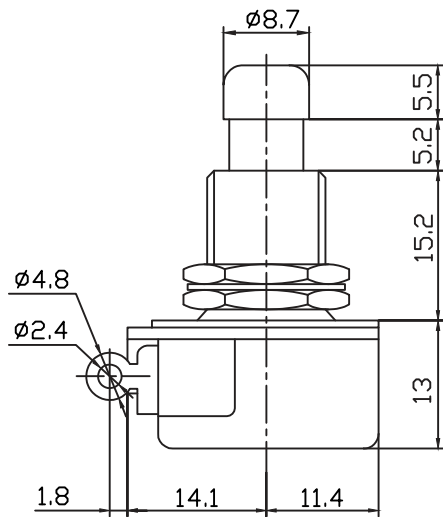

ELECTRICAL

Rating: 4A 125V AC ,2A 250V AC

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ/500VDC Min

Withstanding Voltage: AC1000V/1Min

Operating Temperature: -25°C~+85°C

Electrical Life: 50000 Cycles

ORDER INFORMATION

Product NO: RHTGYBS-016 X

Push Button Switch Series

Function: B=ON-OFF

C=ON-(OFF) D=OFF-(ON)