

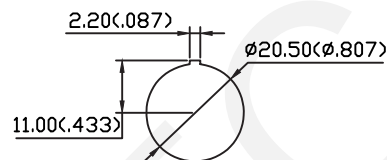
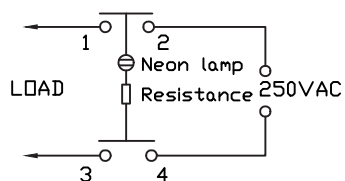



Circuit of switch

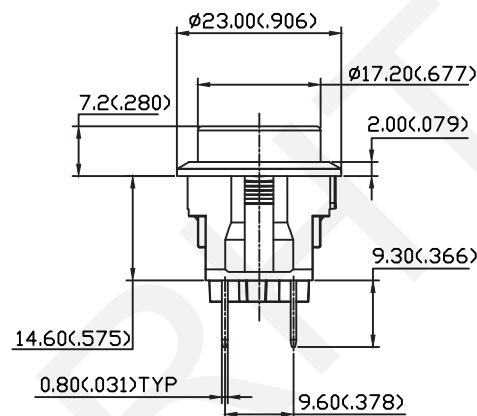

Panel cut out thickness:
0.8~3mm(0.031"~0.118")

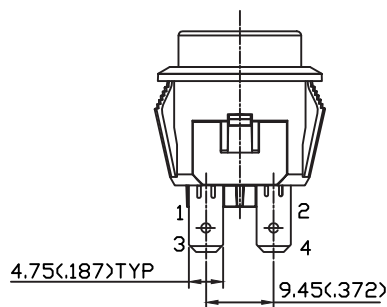

CIRCUIT DPST



Description:

Electrical rating:

12A 125VAC/250VAC VDE:10(4)A250VAC

Contact resistance: <20mΩ

Insulation resistance:

>1000MΩ(500DC between open contacts)

Dielectric strength: >1500V 1 minute

Mechanical life: >30000 Cycles

Electrical life: >10000 Cycles

Temperature rise at hte terminal: Max.30°C

Solder ability of terminal: Max350°C,3S

ORDER INFORMATION

Product NO.: RHTGY27-201 N G B

Switches No _____

Function _____

N=With Light _____

G=green light _____

B=Bold _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

Bold green light 220v Self
lock,Opening diameter=20mm

THIRD ANGLE PROJECTION



RHTGY27-201NGB