

A

B

C

D

E

F

A

B


C

D



E

F

G

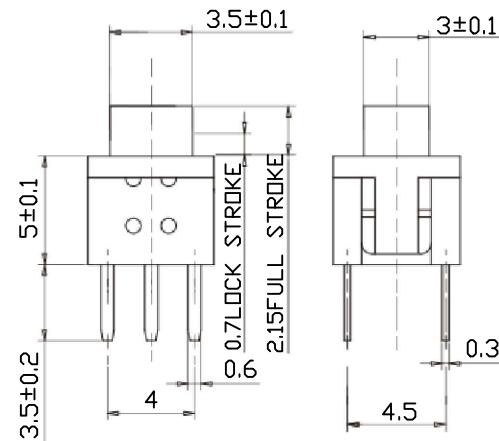

5.8 Unlocked: X=0.40±1 Y=0.40±1 Z=1.50±1

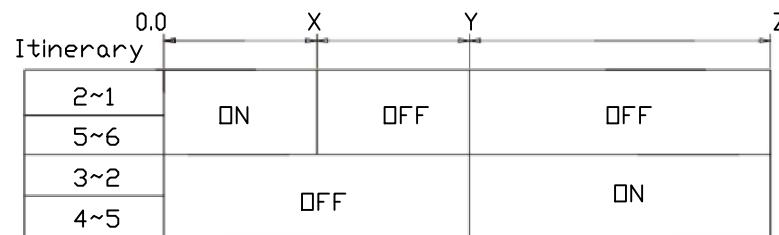

## Electrical:

- 1.Rated load:36V 0.2A
- 2.Contact Resistance: $\leq 30\text{m}\Omega$
- 3.Insulation Resistance: $\geq 100\text{M}\Omega$
- 4.Withstand Voltage:AC250V(50Hz)/min
- 5.Actuating Force:260±30g
- 6.Electrically Life:5000 cycles Min.
- 7.Environment temperature: $-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$

## Materials:

- 1.Cover: nylon, gray
- 2.Base: nylon and brass
- 3.Axis: Poly potassium aldehyde, white
- 4.Spring: stainless steel wire, black
- 5.Hook: stainless steel needle, silver
- 6.retainer: 0.045mm composite silver phosphor bronze

## ORDER INFORMATION

Product NO.: RHTGY5.8x5.8-1-A

Size: 5.8x5.8

1-With self-locking function

A-Flat Head



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGY5.8x5.8-1-A