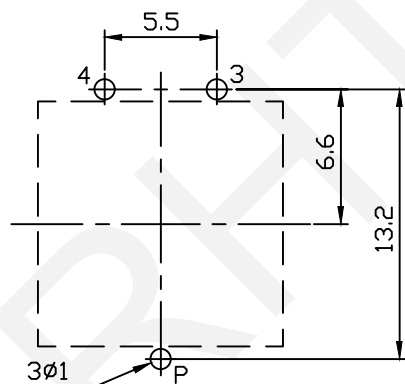
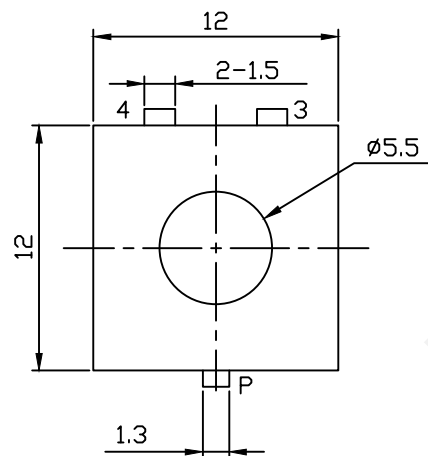
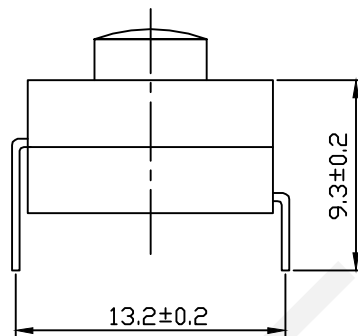
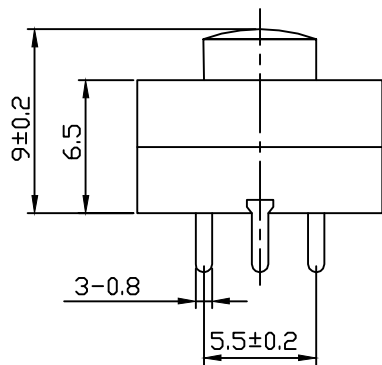


Electrical:

- 1.Rated load:0.5A 50V DC
- 2.Contact Resistance: $\leq 100\text{m}\Omega$
- 3.Insulation Resistance: $\geq 100\text{M}\Omega$
- 4.Withstand Voltage:500V AC 1minute
- 5.Actuating Force:750g $\pm$ 50g
- 6.Electrically Life: ≥ 50000 cycles
- 7.Environment temperature:-40°C~+70°C

Materials:

- 1.Base: POM
- 2.Cover:POM
- 3.Upper teeth:POM
- 4.Bottom teeth:POM
- 5.The needle:H62 brass band Y1=0.38mm
- 6.Short Needle:H62 brass band Y1=0.38mm
- 7.Contact sheet:H65 brass band TM=0.3mm

ORDER INFORMATION

Product NO.: RHTGYAN6-301

Serial Number _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTGYAN6-301