


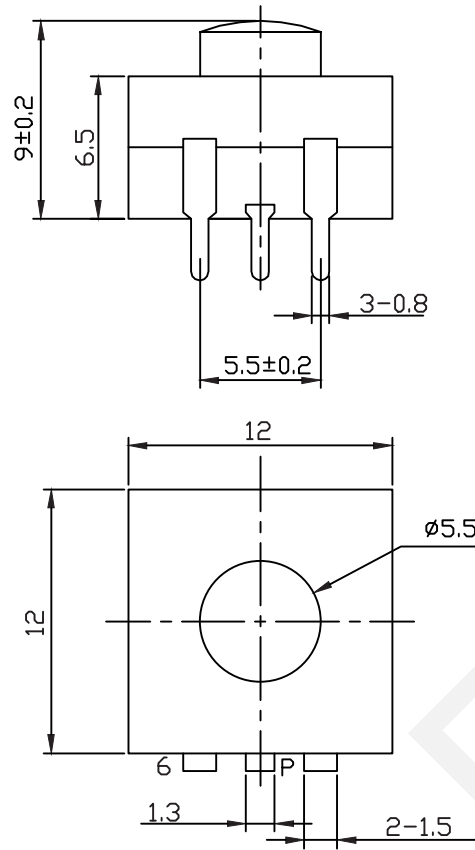

Electrical:

1. Rated load: $0.5A$ $50V$ DC
2. Contact Resistance: $\leq 100m\Omega$
3. Insulation Resistance: $\geq 100M\Omega$
4. Withstand Voltage: $500V$ AC 1minute
5. Actuating Force: $750g \pm 50g$
6. Electrically Life: ≥ 50000 cycles
7. Environment temperature: $-40^{\circ}C \sim +70^{\circ}C$

Materials:

1. Base: POM
2. Cover: POM
3. Upper teeth: POM
4. Bottom teeth: POM
5. The needle: H62 brass band $Y1=0.38mm$
6. Short Needle: H62 brass band $Y1=0.38mm$
7. Contact sheet: H65 brass band $TM=0.3mm$

ORDER INFORMATION

Product NO.: RHTGYAN6-311A

Serial Number _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTGYAN6-311A