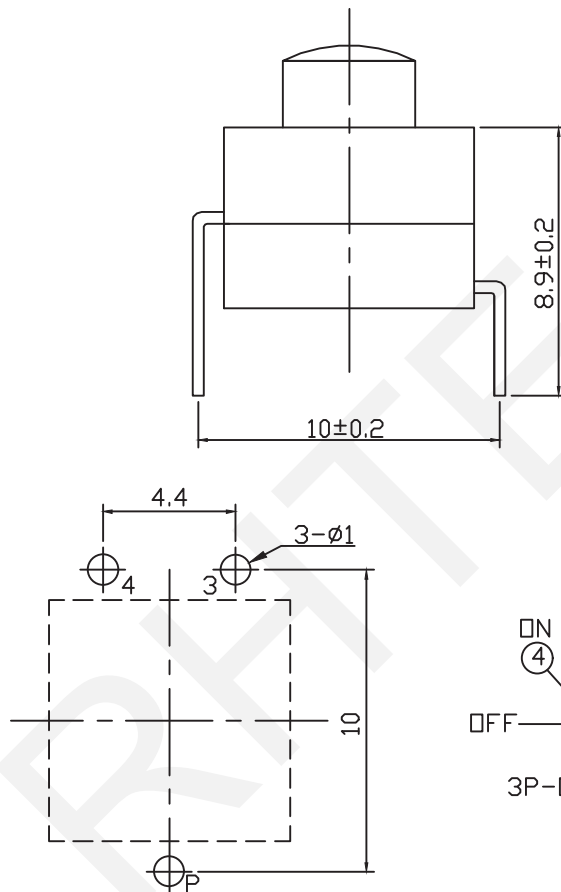
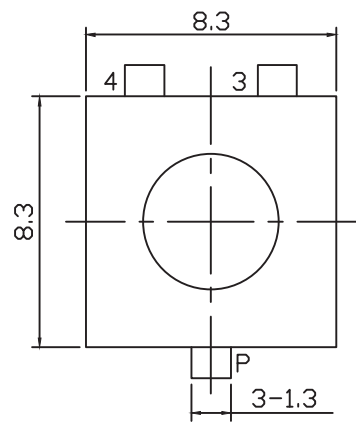
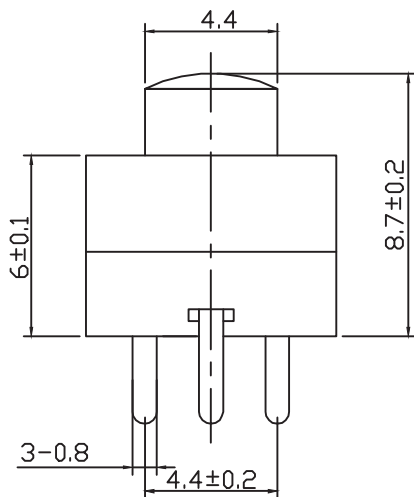


Electrical:

- 1.Rated load:0.5A 50V DC
- 2.Contact Resistance: $\leq 100\text{m}\Omega$
- 3.Insulation Resistance: $\geq 100\text{M}\Omega$
- 4.Withstand Voltage:500V AC 1minute
- 5.Actuating Force:750g $\pm 50\text{g}$
- 6.Electrically Life: ≥ 50000 cycles
- 7.Environment temperature:-40°C~+70°C

Materials:

- 1.Base: PDM
- 2.Cover:PDM
- 3.Upper teeth:PDM
- 4.Bottom teeth:PDM
- 5.The needle:H62 brass band Y1=0.38mm
- 6.Short Needle:H62 brass band Y1=0.38mm
- 7.Contact sheet:H65 brass band TM=0.3mm

ORDER INFORMATION

Product NO.: RHTGYAN6G-301

Serial Number _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5

CHK'D BY FENG
APPR BY ZHAN

Push Button Switches

THIRD ANGLE PROJECTION



RHTGYAN6G-301