

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

G

A

B





C

D

E

F

G

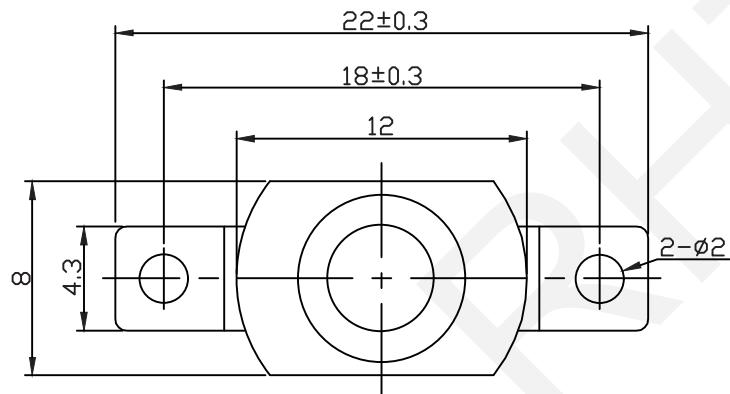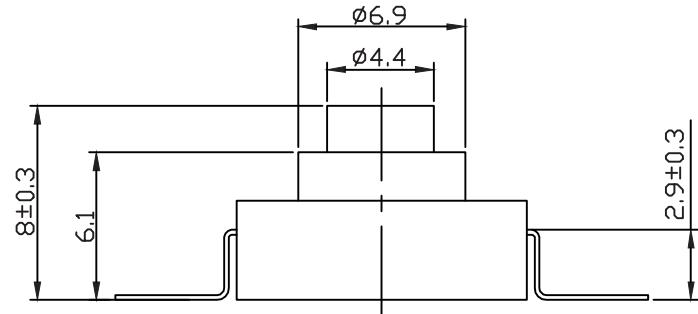

Electrical:

- 1.Rated load:0.5A 50V DC
- 2.Contact Resistance: $\leq 100\text{m}\Omega$
- 3.Insulation Resistance: $\geq 100\text{M}\Omega$
- 4.Withstand Voltage:500V AC 1minute
- 5.Actuating Force:750g $\pm 50\text{g}$
- 6.Electrically Life: ≥ 50000 cycles
- 7.Environment temperature: $-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$

Materials:

- 1.Base: POM
- 2.Cover:POM
- 3.Upper teeth:POM
- 4.Bottom teeth:POM
- 5.The needle:H62 brass band $Y_1=0.38\text{mm}$
- 6.Short Needle:H62 brass band $Y_1=0.38\text{mm}$
- 7.Contact sheet:H65 brass band $T_M=0.3\text{mm}$

ORDER INFORMATION

Product No.: RHTGYAN8-001E

Serial Number _____



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTGYAN8-001E

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---