

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A

B





C

D

E

F

G

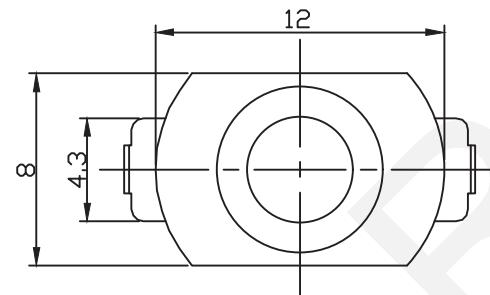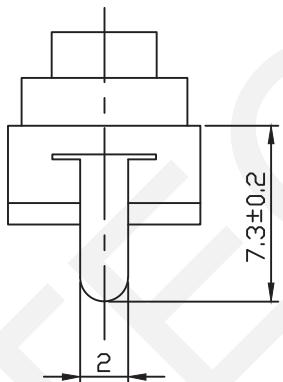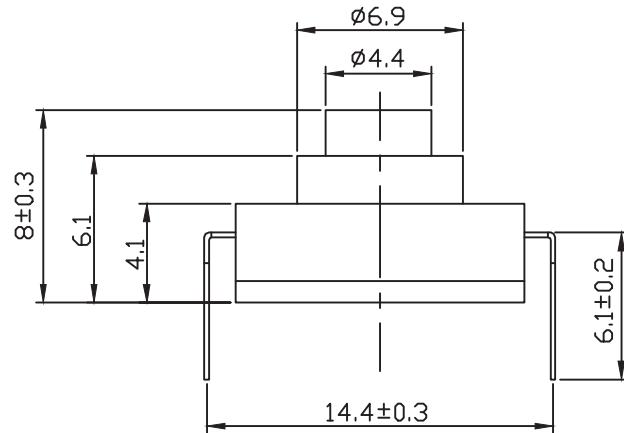

Electrical:

1. Rated load: 0.5A 50V DC
2. Contact Resistance: $\leq 100\text{m}\Omega$
3. Insulation Resistance: $\geq 100\text{M}\Omega$
4. Withstand Voltage: 500V AC 1 minute
5. Actuating Force: 750g±50g
6. Electrically Life: ≥ 50000 cycles
7. Environment temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Materials:

1. Base: POM
2. Cover: POM
3. Upper teeth: POM
4. Bottom teeth: POM
5. The needle: H62 brass band $Y1=0.38\text{mm}$
6. Short Needle: H62 brass band $Y1=0.38\text{mm}$
7. Contact sheet: H65 brass band $TM=0.3\text{mm}$

ORDER INFORMATION

Product No.: RHTGYAN8-001J

Serial Number _____



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYAN8-001J

1

2

3

4

5

6

7

8

9