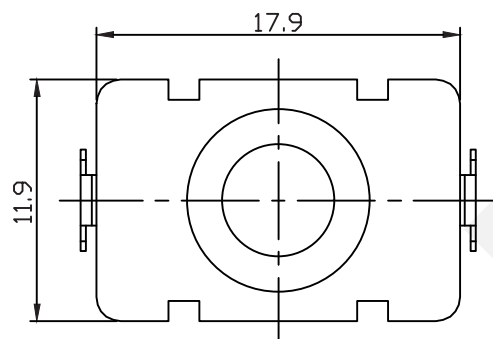
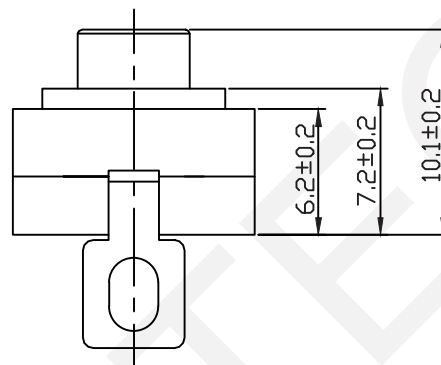
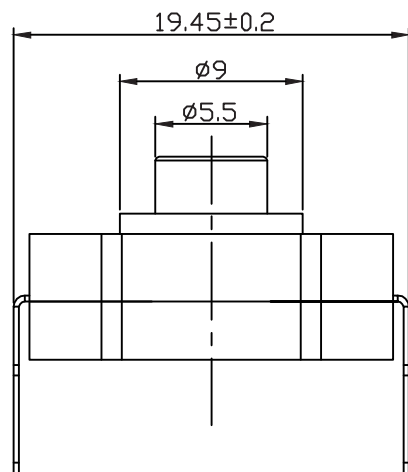


2P-ON-OFF

Electrical:

1. Rated load: 1.5A 250V DC
2. Contact Resistance: $\leq 50\text{m}\Omega$
3. Insulation Resistance: $\geq 100\text{M}\Omega$
4. Withstand Voltage: 500V AC 1 minute
5. Actuating Force: $750\text{g} \pm 50\text{g}$
6. Electrically Life: ≥ 50000 cycles
7. Environment temperature: $-40^\circ\text{C} \sim +70^\circ\text{C}$

Materials:

1. Base: POM
2. Cover: POM
3. Upper teeth: POM
4. Bottom teeth: POM
5. Contact: H65 brass band $\text{TM} = 0.3\text{mm}$
6. Horizontal needle: H62 brass band $\text{Y1} = 0.28\text{mm}$

ORDER INFORMATION

Product NO.: RHTGYAN8-008A

Serial Number

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTGYAN8-008A