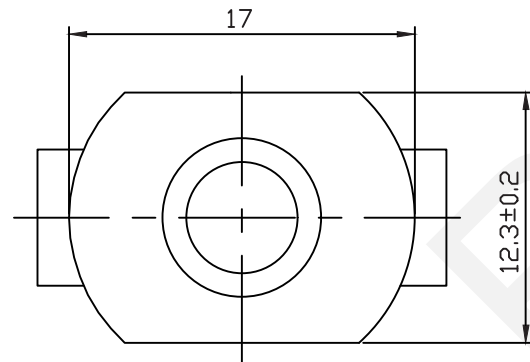
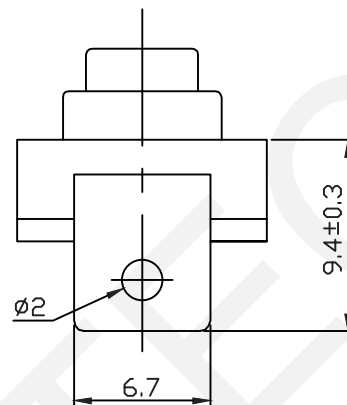
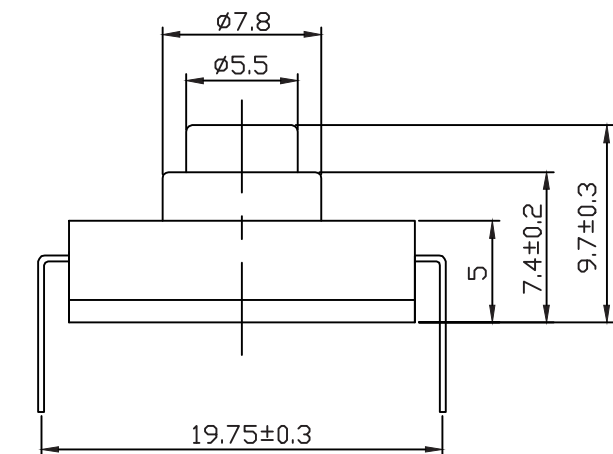


2P-ON-OFF

Electrical:

- 1.Rated load:1.5A 250V DC
- 2.Contact Resistance: $\leq 50\text{m}\Omega$
- 3.Insulation Resistance: $\geq 100\text{M}\Omega$
- 4.Withstand Voltage:500V AC 1minute
- 5.Actuating Force:750g $\pm 50\text{g}$
- 6.Electrically Life: ≥ 50000 cycles
- 7.Environment temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Materials:

- 1.Base: POM
- 2.Cover:POM
- 3.Upper teeth:POM
- 4.Bottom teeth:POM
- 5.Contact:H65 brass band $\text{TM}=0.3\text{mm}$
- 6.Vertical needle:H62 brass band $\text{Y1}=0.28\text{mm}$

ORDER INFORMATION

Product NO.: RHTGYAN8-105

Serial Number _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTGYAN8-105