

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

A

B

B

C

C

D

D

E





E

F

F

G

G

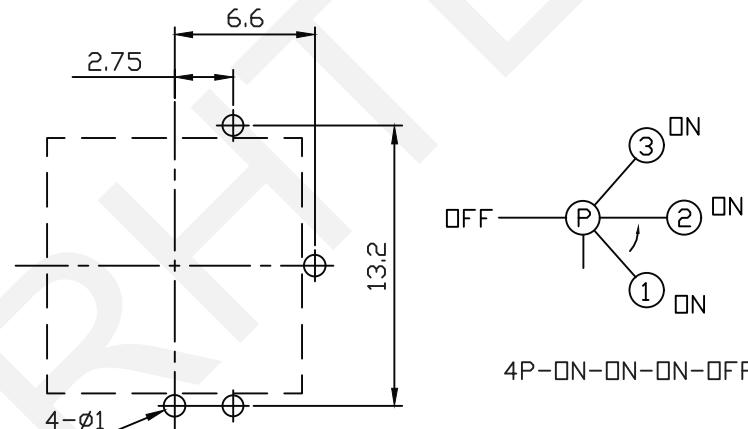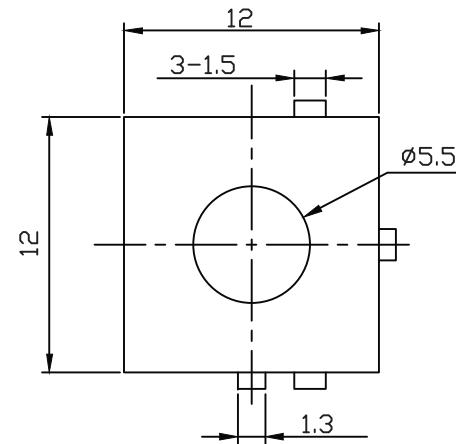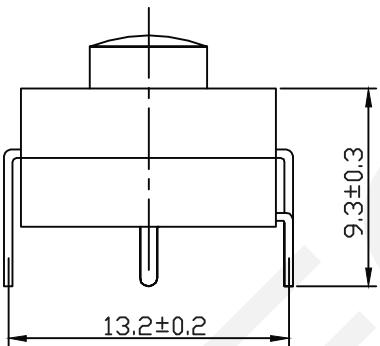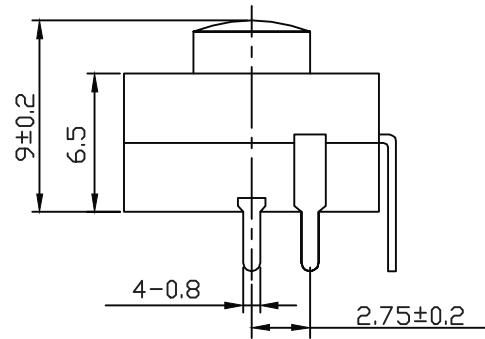

#### Electrical:

- 1.Rated load:0.5A 50V DC
- 2.Contact Resistance: $\leq 100\text{m}\Omega$
- 3.Insulation Resistance: $\geq 100\text{M}\Omega$
- 4.Withstand Voltage:500V AC 1 minute
- 5.Actuating Force:750g $\pm 50\text{g}$
- 6.Electrically Life: $\geq 50000$  cycles
- 7.Environment temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

#### Materials:

- 1.Base: POM
- 2.Cover:POM
- 3.Upper teeth:POM
- 4.Bottom teeth:POM
- 5.The needle:H62 brass band Y1=0.38mm
- 6.Short Needle:H62 brass band Y1=0.38mm
- 7.Contact sheet:H65 brass band TM=0.3mm

#### ORDER INFORMATION

Product No.: RHTGYAN8-408

Serial Number

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	APPR BY ZHAN	

Push Button Switches



RHTGYAN8-408

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---