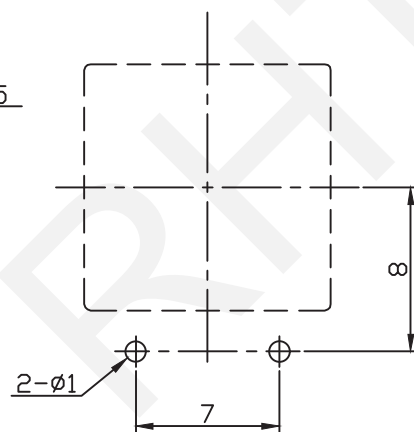
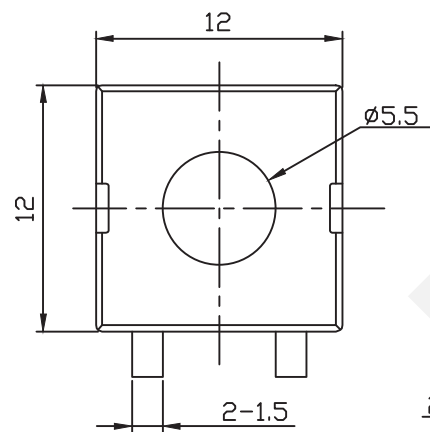
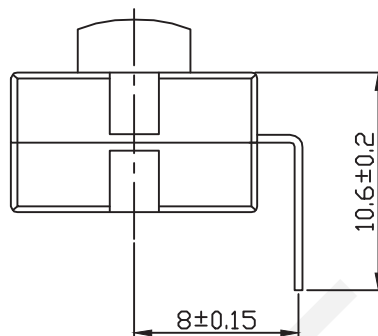
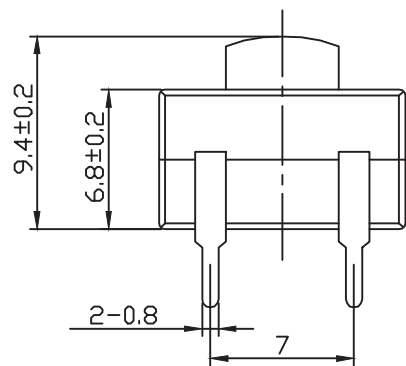


Electrical:

- 1.Rated load:0.5A 50V AC
- 2.Contact Resistance:≤100mΩ
- 3.Insulation Resistance:≥100MΩ
- 4.Withstand Voltage:500V AC 1minute
- 5.Actuating Force:750g±50g
- 6.Electrically Life:≥50000 cycles
- 7.Environment temperature:-40°C~+70°C

Materials:

- 1.Base: PDM
- 2.Cover:PDM
- 3.Upper teeth:PDM
- 4.Bottom teeth:PDM
- 5.The needle:H62 brass band Y1=0.38mm
- 6.Short Needle:H62 brass band Y1=0.38mm
- 7.Contact sheet:H65 brass band TM=0.3mm

ORDER INFORMATION

Product NO.: RHTGYAN8F-213

Serial Number _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Button Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYAN8F-213