



1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---


A

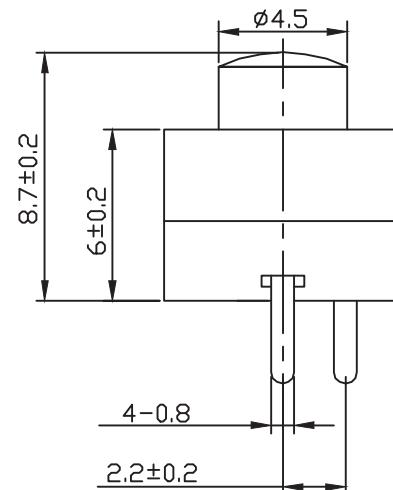


B

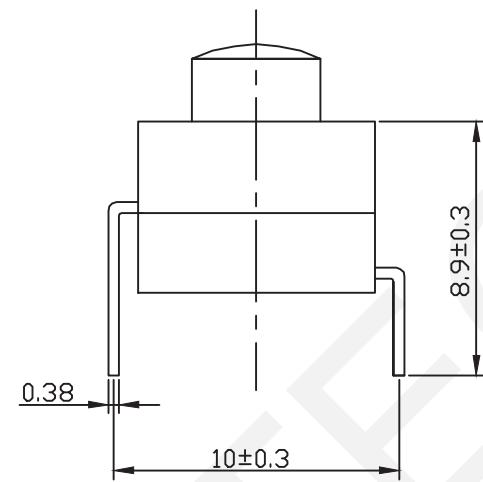

C

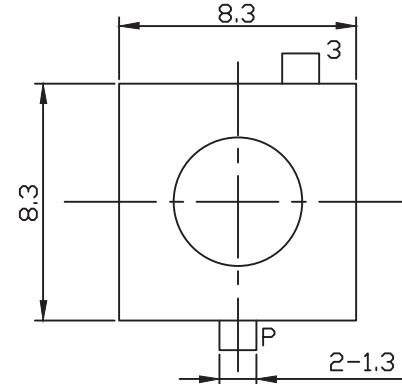

D

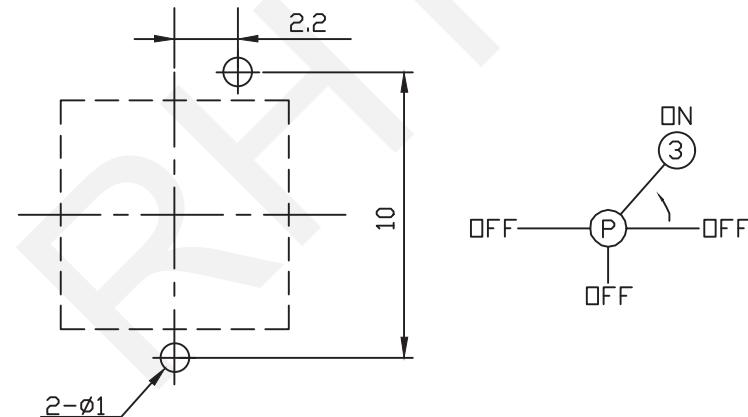

E

Electrical:

- 1.Rated load:0.5A 50V AC
- 2.Contact Resistance: \leq 100mΩ
- 3.Insulation Resistance: \geq 100MΩ
- 4.Withstand Voltage:500V AC 1minute
- 5.Actuating Force:750g \pm 50g
- 6.Electrically Life: \geq 50000 cycles
- 7.Environment temperature: -40°C \sim $+70^{\circ}\text{C}$

Materials:

- 1.Base: POM
- 2.Cover:POM
- 3.Upper teeth:POM
- 4.Bottom teeth:POM
- 5.The needle:H62 brass band Y1=0.38mm
- 6.Short Needle:H62 brass band Y1=0.38mm
- 7.Contact sheet:H65 brass band TM=0.3mm

ORDER INFORMATION

Product NO.: RHTGYAN8G-202

Serial Number _____

F



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Push Button Switches



RHTGYAN8G-202

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

G