

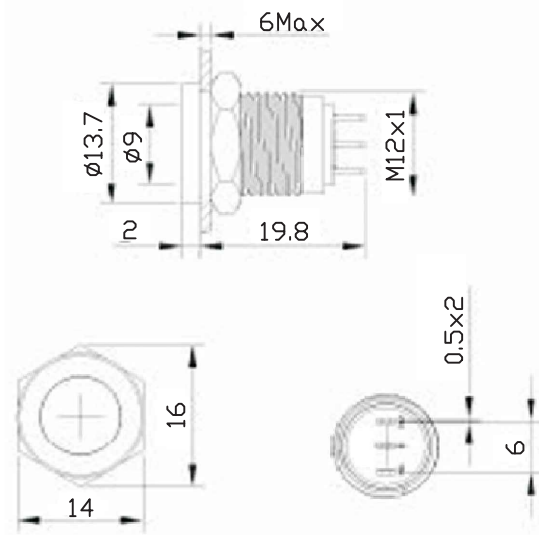
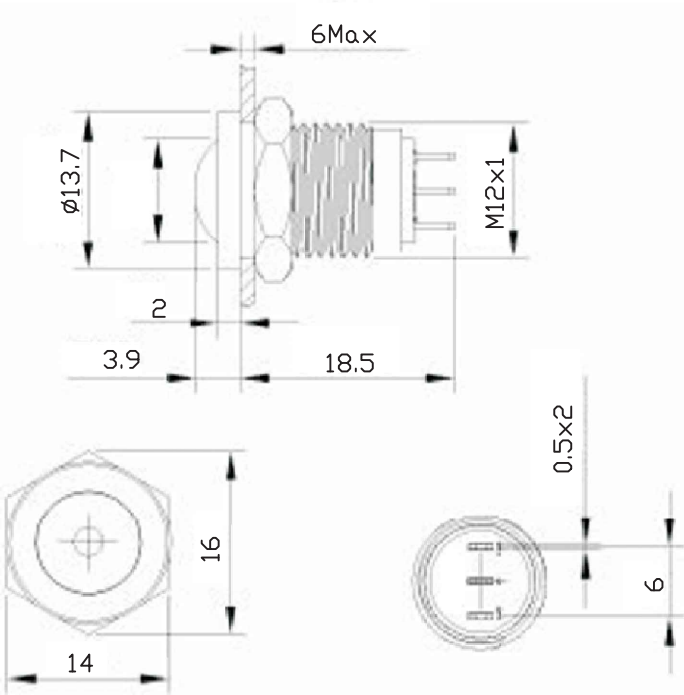


	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SCALE:--- 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Metal Push Button Switch THIRD ANGLE PROJECTION 	
	1	2	3	4	5	6	7	8	9



Mount Hole Size:ø12mm
Switch Rating:100mA/12VDC
Contact Condiguration:1NO1NC
Operation Type:Latching
Operation travel: 2mm
IP degree:IP40,IP65
Mechanical life: > 100,000 times
Electrical Life: > 50,000 times
Specification
Mechanical Life:>100,000 times
Switch Type:Bulit-in switch module
Switch Specification:Ith:100mA,Ui :12VDC
Electrical Lift:>50,000 times
Panel Thickness:1~10 mm
Torque:5~14 Nm
Operation Stroke:2mm About 2mm
Material
Button:Stainless Steel
Case:Stainless Steel
Base:PBT

ORDER INFORMATION
Product NO.: RHTGYBGQ12B(F)-11Z-S
Serial Number_____