

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A

B



C

D

E

F

G

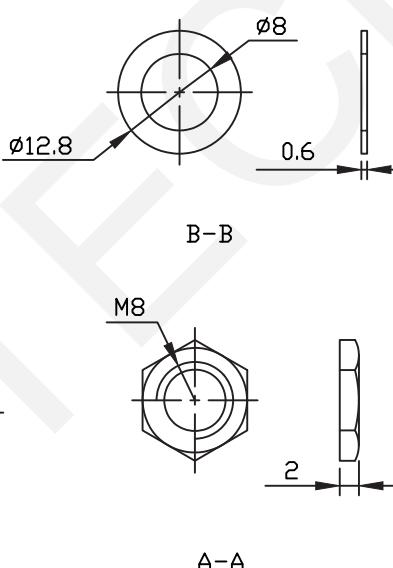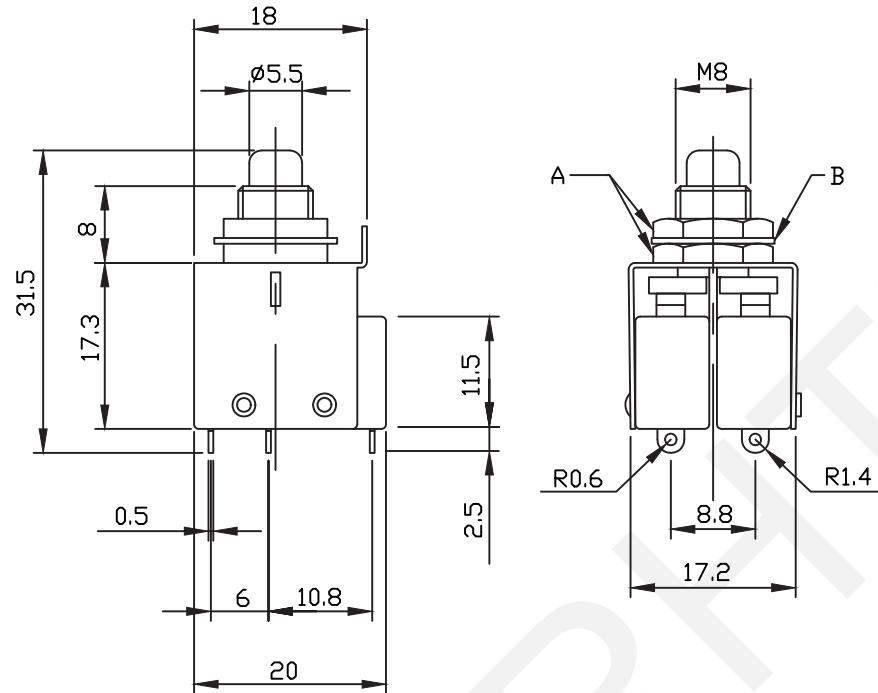

Material:  
Plastic parts material: PBT  
Copper Material: Brass H62  
Silver contact material: silver  
Cadmium oxide AgCdO

#### Specification:

- 1.Rating:3A 250V / 5A 125V
- 2.Contact R:  $\leq 50\text{m}\Omega$
- 3.Insulation R:  $\geq 100\text{M}\Omega$
- 4.Dielectric strength: 1500V~2500V
- 5.Setting Temperature:-55°C~120°C
- 6.Electrical Life:50000 Cycles
- 7.Machine Life:100000 Cycles
- 8.Operation Force:0.3N~3.5N
- 9.Manual Soldering 300 for 5s

#### ORDER INFORMATION

Product NO.: RHTGYM2-1

Dual switches



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

$\pm 0.12$

$\pm 0.15$

$\pm 0.3$

$\pm 0.5$

APPR BY ZHAN

Pannel mount push button  
switch / dual switches

THIRD ANGLE PROJECTION

RHTGYM2-1

1

2

3

4

5

6

7

8

9