
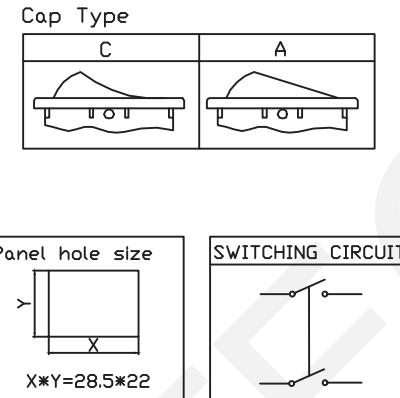
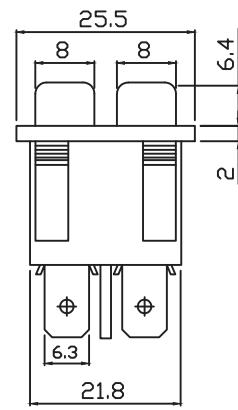


1 2 3 4 5 6 7 8 9

A

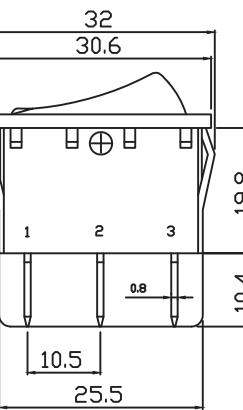

#### MATERIAL


- 1.Housing: Nylon 66
- 2.Rocker: PC & PA66
- 3.Contacts: Silver Alloy
- 4.Terminal: Brass Silver Plated
- 5.Lamp: Neon Lamp,Tungsten Lamp
- 6.Spring: SWP,SUS
- 7.Movable Arm: Brass Silver Plated



#### ELECTRICAL

- 1.Electrical Rating:16(4)A 250VAC T85
- 16(4)A 250VAC T125/55 1E4
- 16A 125V/8A 250AC
- 2.Mechanical life:Over 30000 Cycles
- 3.Electrical life: Over 10000 Cycles
- 4.Contact Resistance:<20mΩ
- 5.Insulation Resistance:>1000MΩ
- 6.High Voltage Resistance:>1500V 1 min
- 7.Ambient Temperature: Terminal Side -20°C~+85°C; Actuating Side -20°C~+55°C
- 8.Storage Temperature: -30°C~+80°C Max
- 9.Atmospheric Humidity: Max 85%
- 10.Actuating force: 4~8N(depends on different switch function)
- 11.Flammability: UL94 V-2
- 12.Temperature rise at the terminal: Max 30°C (UL1054)
- 13.Solder ability of terminal: Max 350°C 3S

#### ORDER INFORMATION

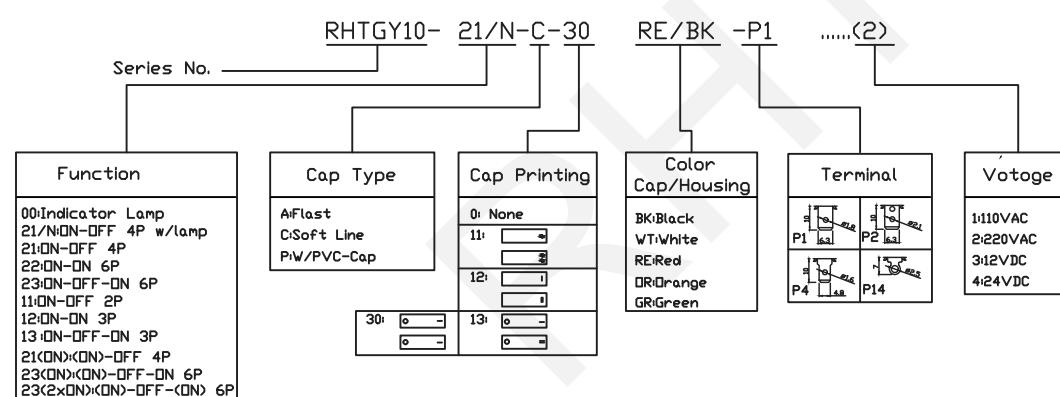

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120 CHK'D BY FENG

±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

Rocker Switch Series



RHTGY10

1 2 3 4 5 6 7 8 9