

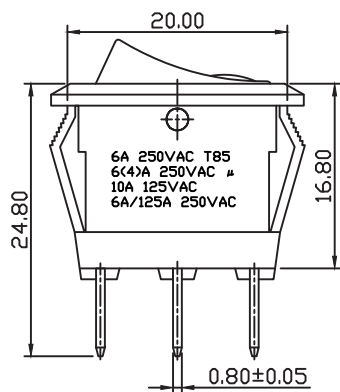



ELECTRICAL

- 1.Electrical Rating: 6A 250V AC T85
6A 125V 250VAC
- 2.Circuit Diagram:3P ON-OFF
- 3.Terminal Strength:≥80N
- 4.Electrical life:≥10000 Cycles
- 5.Withstand Voltage:1800VAC 1min
- 6.Terminals to button:3000VAC 1min
- 7.Leakage Current:1mA
- 8.Contact Resistance: ≤50mΩ(initial)
- 9.Insulation Resistance:≥100MΩ



PANEL CUT-OUT		
Z	Y	X
0.70~1.25	20.00~20.10	2.10~2.20
1.25~2.00	20.10~20.20	2.10~2.20
2.00~3.00	20.20~20.30	2.10~2.20



ORDER INFORMATION

Product NO.:RHTGY26 -1 01 N 1 71A1A1 -4A

Series No.

Poles
1:Single Pole

Function
01:ON-OFF
02:ON-ON
03:ON-OFF-ON

Lamp
0:Lamp Not
N:220V Neon
Lamp

Marking
1: [Symbol]
2: [Symbol]
3: [Symbol]
4: [Symbol]

Color
Cap/Housing
gray

Current
4A

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:----
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Rocker Switches

THIRD ANGLE PROJECTION



RHTGY26