


1 2 3 4 5 6 7 8 9

A

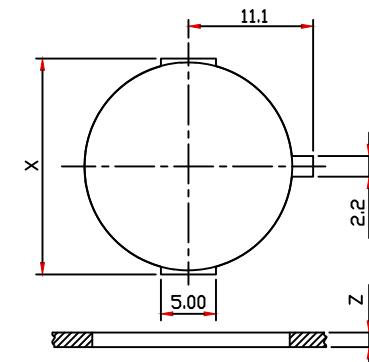

PANEL CUT-OUT

PANEL CUT-OUT		
Z	X	Y
0.70~1.25	20.00~20.30	19.6~19.7
1.25~2.00	20.40~20.70	19.6~19.7
2.00~3.00	20.80~21.10	19.6~19.7

MATERIAL

1.Housing: Nylon 66

2.Rocker: PC & PA66

3.Contacts: Silver Alloy

4.Terminall: Brass Silver Plated

5.Lamp: Neon Lamp,Tungsten Lamp

6.Spring: SWP,SUS

7.Movable Arm: Brass Silver Plated

ELECTRICAL

1.Electrical Rating: 6<4A 250VAC /10A 125VAC

2.Mechanical life:Over 30000 Cycles

3.Electrical life: Over 10000 Cycles

4.Contact Resistance: $\leq 50\text{m}\Omega$

5.Insulation Resistance: $\geq 100\text{M}\Omega$

6.High Voltage Resistance: $>1500\text{V}$ 1 min

7.Ambient Temperature: Terminal Side -20°C~+85°C;

Actuating Side -20°C~+55°C

8.Storage Temperature: -30°C~+80°C Max

9.Atmospheric Humidity: Max 85%

10.Actuating force: 4~8N(depends on different switch function)


11.Flammability: UL94V-2

12.Temperature rise at the terminal: Max 30°C (UL1054)

13.Solder ability of terminal: Max 350°C 3S

ORDER INFORMATION

RHTGY28- 1 01 0 1 1 B B

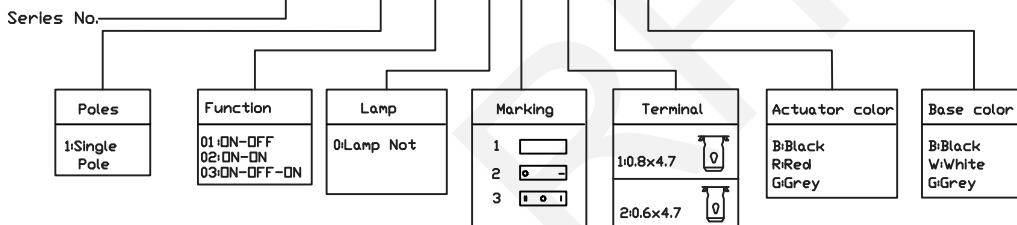

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Rocker Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTGY28

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G