

A

B

C

D

E

F

G

A

B

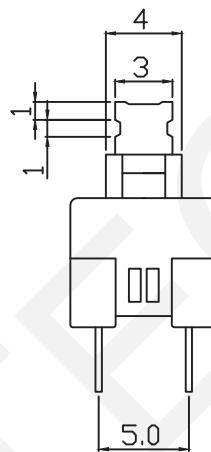
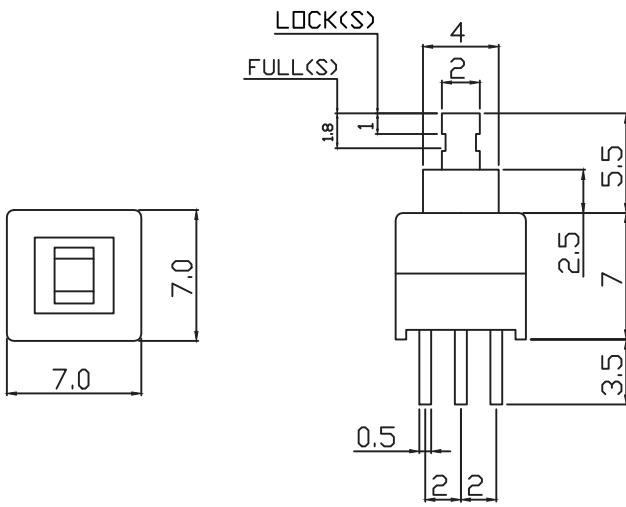




C

D

E

F

G

FREEPUSHSCHEMATIC**ELECTRICAL**

Rating : DC30V 0.1A

Insulation Resistance : &gt;100MΩ DC125V

Withstand Voltage : AC 125V 1 minute

Contact Resistance : &lt;100mΩ

Soldering Temper : 250°C max.3sec

Mechanical Life : 100,000 cycles

Electrical Life : 10,000 cycles

Ambient Temper.Used : -25°C to +65°C

Ambient Humidity Used : &lt;85% RH

Operating force : 150±80 gf

**ORDER INFORMATION**

RHTGY7.0X7.0 X

Standard Vertical Push Switch Series

0=Non Lock 1=lock

RHTECN<sup>®</sup> NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Standard Vertical Push Switch Series

0~3 3~18 18~50 50~120

CHK'D BY FENG

±0.12 ±0.15 ±0.3 ±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTGY7.0X7.0