

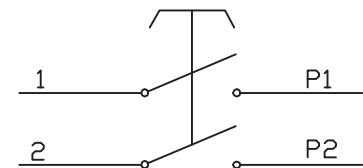
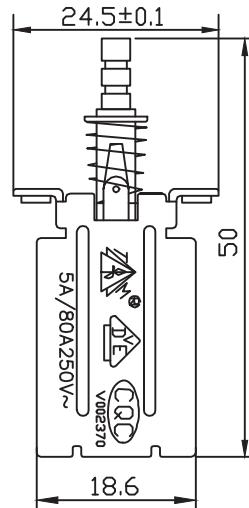


1 2 3 4 5 6 7 8 9

A

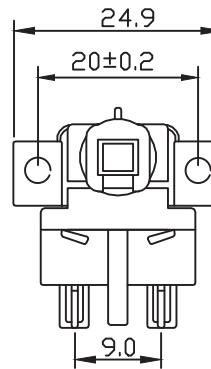

Circuit diagram

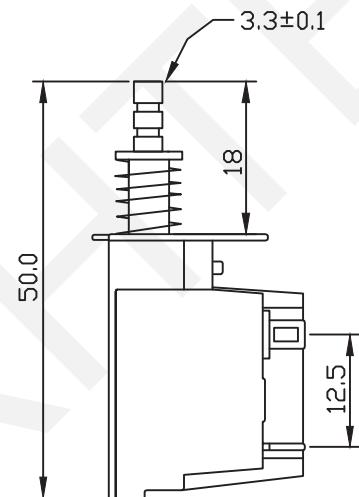

Electrical :
Electrical Rating: 5A/80A 250VAC
Ambient temperature: -25°C~+85°C
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100MΩ Min.
Dielectric strength: ≥1500V;
Between terminals and frame ≥3000V

Mechanical:
Actuating Force: 5±3N
Life: 10000 cycles

ORDER INFORMATION

RHTGYS-004-L

Switches No.

Function: L=Lock, N=Unlock

RHTECP®

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS-004

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G