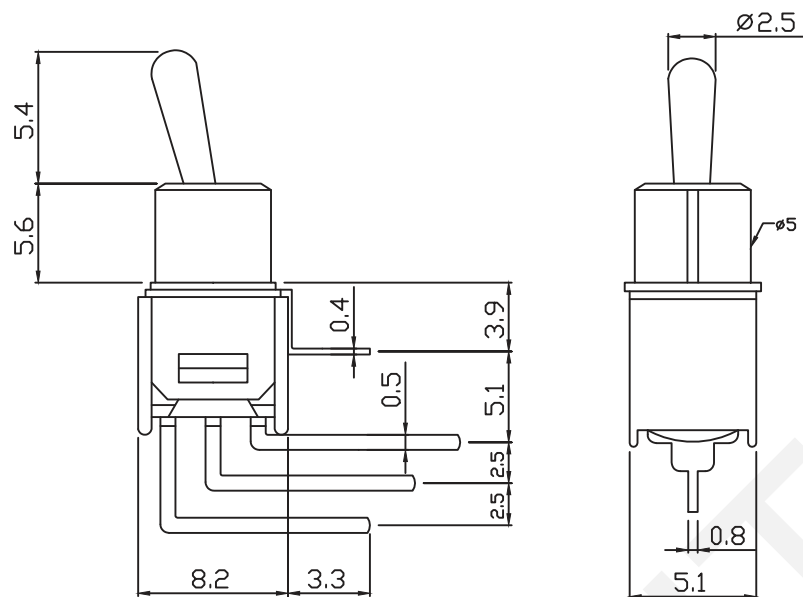


PCB LAYOUT

SPECIFICATIONS

Rating: 3A 125VAC; 1A 250VAC
 Contact Resistance: 20M Ω max
 Insulation Resistance: 500V DC 1000M Ω Min
 Dielectric Strength: 1000V AC 1 Minute
 Operating Temperature: -25°C~+65°C
 Electrical Life :20,000 Cycles

ORDER INFORMATION

RHTGYMS-1 02-C 4 X X

Toggle Switch Series

POLES 1=Single Pole

2=Double Pole

CIRCUIT: 01=ON-OFF 02=ON-ON

03=ON-OFF-ON

Handle Type: A=Standard C=Short

Terminal Type: 1=Solder Terminal

2=Pc Terminal 3=Pc-H Terminal

4=Pc-V Terminal

Handle Cap Type: R=Red B=Black

W=White Y=Yellow G=Green BL=Blue

BRACKET: T=With Bracket

None=Without Bracket

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Toggle Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTGYMS-102-C4


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4



5

6

7

8

9

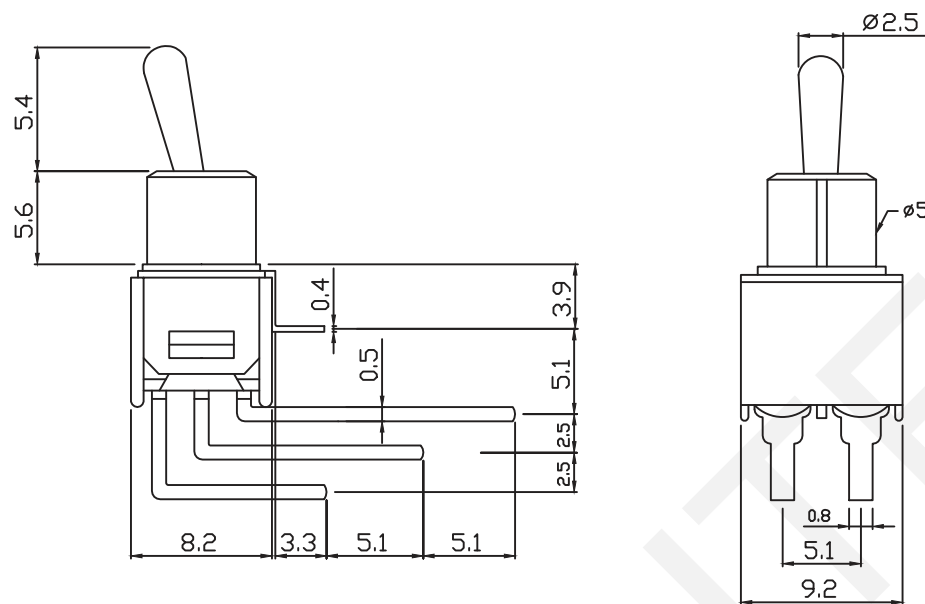

PCB LAYOUT

SPECIFICATIONS

Rating: 3A 125VAC; 1A 250VAC

Contact Resistance: 20MΩ max

Insulation Resistance: 500V DC 1000MΩ Min

Dielectric Strength: 1000V AC 1 Minute

Operating Temperature: -25°C~+65°C

Electrical Life :20,000 Cycles

ORDER INFORMATION

RHTGYMS-2 02-C 4 X X

Toggle Switch Series

POLES 1: Single Pole

2: Double Pole

CIRCUIT: 01=ON-OFF 02=ON-ON

03=ON-OFF-ON

Handle Type: A=Standard C=Short

Terminal Type: 1=Solder Terminal

2=Pc Terminal 3=Pc-H Terminal

4=Pc-V Terminal

Handle Cap Type: R=Red B=Black

W=White Y=Yellow G=Green BL=Blue

BRACKET: T=With Bracket

None=Without Bracket

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Toggle Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTGYMS-202-C4


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9