


Outline Drawing

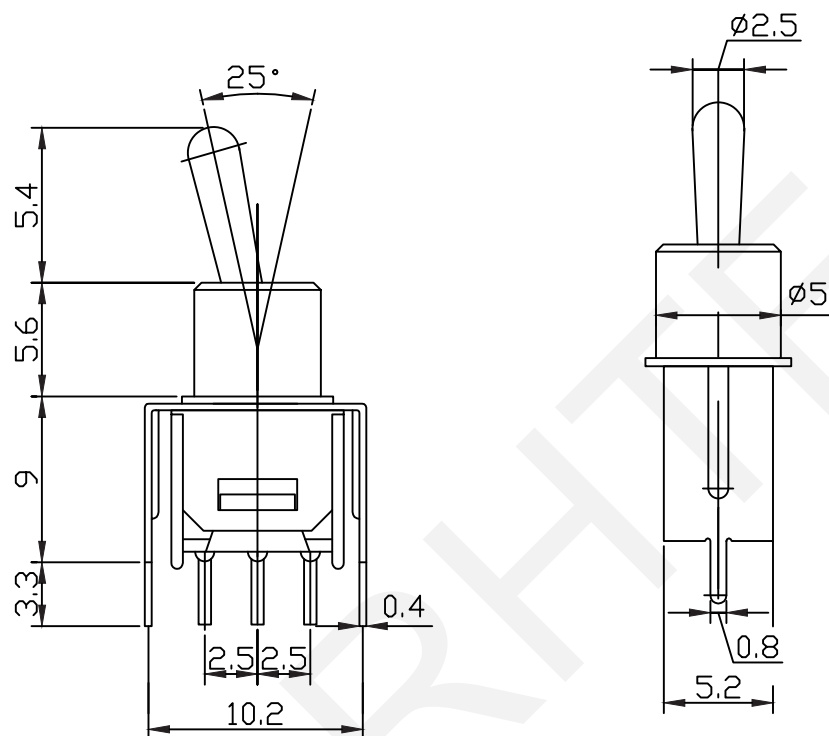

SPECIFICATIONS:

Rating: 3A 125VAC; 1.5A 250VAC

Contact Resistance: 20mΩ max

Insulation Resistance: 500V DC 1000MΩ Min

Dielectric Strength: 1000V AC 1 Minute

Operating Temperature: -25°C+85°C

Electrical Life :10,000 cycles

ORDER INFORMATION

RHTGYMS-103-C2T

SMS: Toggle Switch Series-

POLES: 1=Single Pole

CIRCUIT: 03=ON-OFF-ON

Handle Type: A=Standard

Terminal Type: 2=Pc terminal

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG





APPR BY ZHAN

Sub-Miniature Toggle Switch

THIRD ANGLE PROJECTION



RHTGYMS-103-C2T

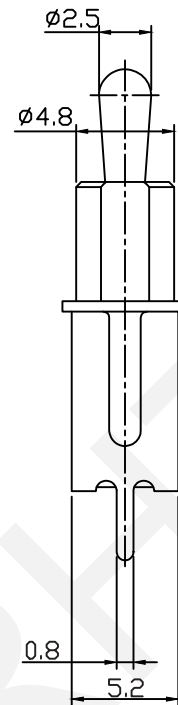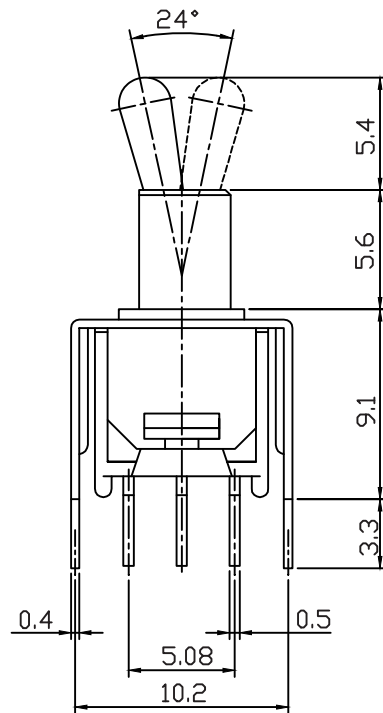

Notes:

Rating: 3A 125VAC; 1.5A 250VAC

Contact Resistance: 20mΩ max

Insulation Resistance: 500V DC 1000MΩ Min

Dielectric Strength: 1000V AC 1 Minute

Operating Temperature: -25°C+85°C

Electrical Life :10,000 cycles

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Toggle Switch

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYMS-103-C2T