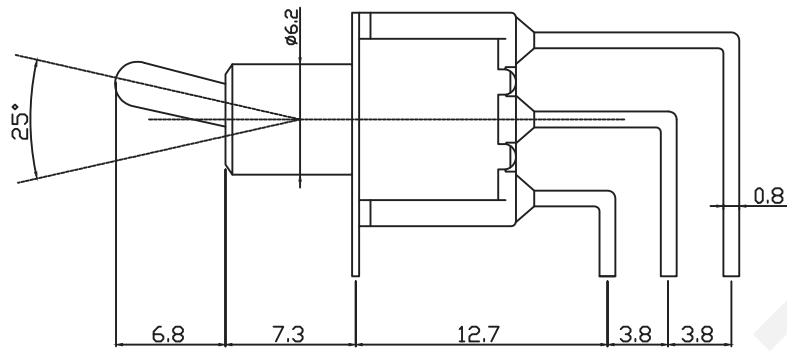


PCB LAYOUT




SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
Contact Resistance: 20MΩ max
Insulation Resistance: 500V DC 1000MΩ Min
Dielectric Strength: 1500V AC 1 Minute
Operating Temperature: -55°C+85°C
Electrical Life: ≥20,000 cycles

ORDER INFORMATION

RHTGYS-1 02-C 4 X X

Miniature Toggle Switch Series
POLES 1 :=Single Pole
2=Double Pole
CIRCUIT 01=ON-OFF :
02=ON-ON,03=ON-OFF-ON
Handle Type: A=Standard C=Short
Terminal Type: 1=Solder terminal
2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
Handle Cap Type: R=Red B=Black W=White
Y=Yellow G=Green BL=Blue
BRACKET: T=With Bracket None=Without Bracket

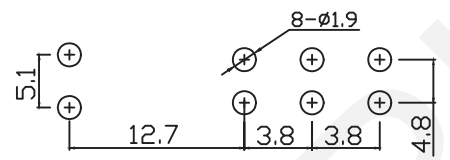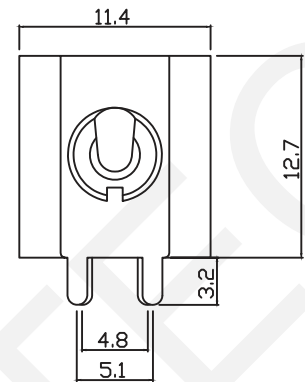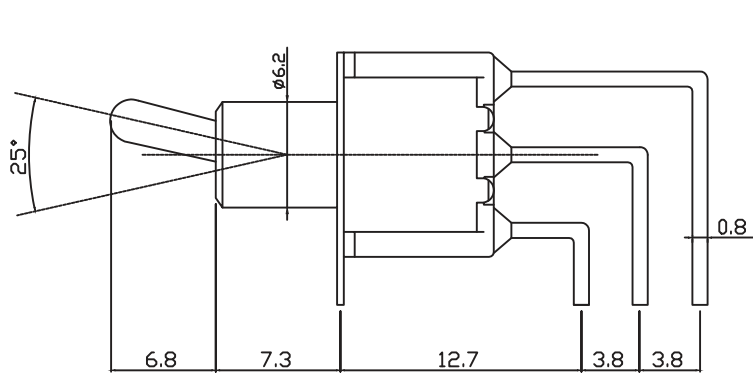

PCB LAYOUT

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
 Contact Resistance: 20MΩ max
 Insulation Resistance: 500V DC 1000MΩ Min
 Dielectric Strength: 1500V AC 1 Minute
 Operating Temperature: -55°C+85°C
 Electrical Life: 20,000 cycles

ORDER INFORMATION

RHTGYS-2 02-C 4 X X

Miniature Toggle Switch Series
 POLES 1 =Single Pole
 2=Double Pole
 CIRCUIT 01=ON-OFF :
 02=ON-ON,03=ON-OFF-ON
 Handle Type: A=Standard C=Short
 Terminal Type: 1=Solder terminal
 2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
 Handle Cap Type: R=Red B=Black W=White
 Y=Yellow G=Green BL=Blue
 BRACKET: T=With Bracket None=Without Bracket