



	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Miniature Toggle Switch Series THIRD ANGLE PROJECTION  RHTGYS-402-A1		
	1	2	3	4	5	6	7	8	9

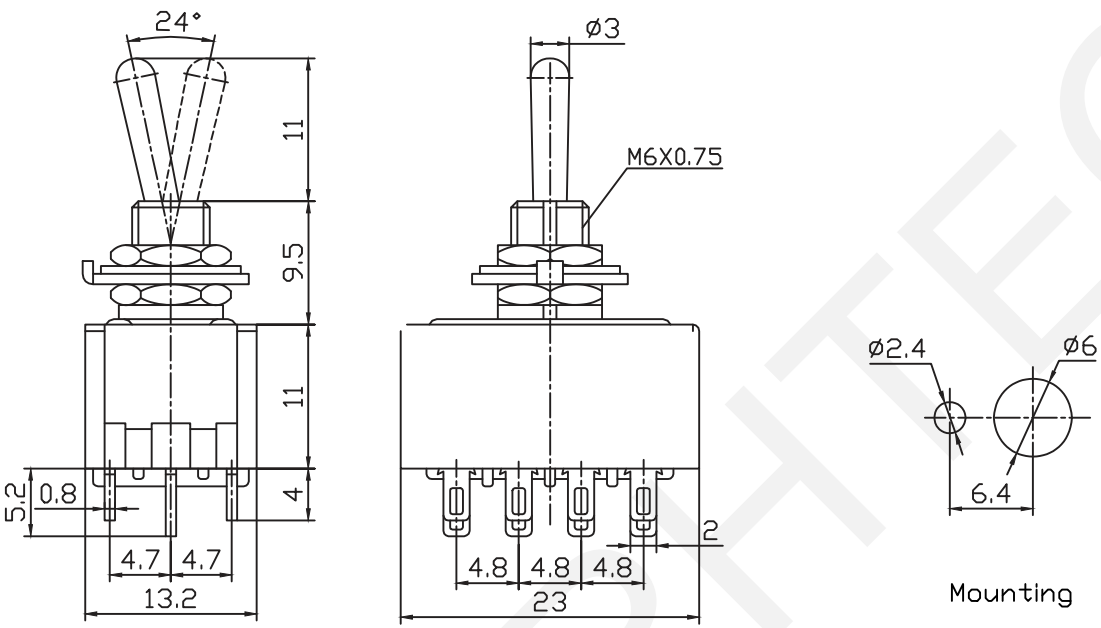

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
Contact Resistance: 20MΩ max
Insulation Resistance:500V DC 1000MΩ Min
Dielectric Strength:1500V AC 1 Minute
Operating Temperature:-55°C+85°C
Electrical Life :20,000 cycles

ORDER INFORMATION

RHTGYS-4 02-A 1 X X

Miniature Toggle Switch Series
POLES 1 :=Single Pole
2=Double Pole
CIRCUIT 01=ON-OFF :
02=ON-ON,03=ON-OFF-ON
Handle Type: A=Standard C=Short
Terminal Type: 1=Solder terminal
2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
Handle Cap Type:R=Red B=Black W=White
Y=Yellow G=Green BL=Blue
BRACKET: T=With Bracket None=Without Bracket