
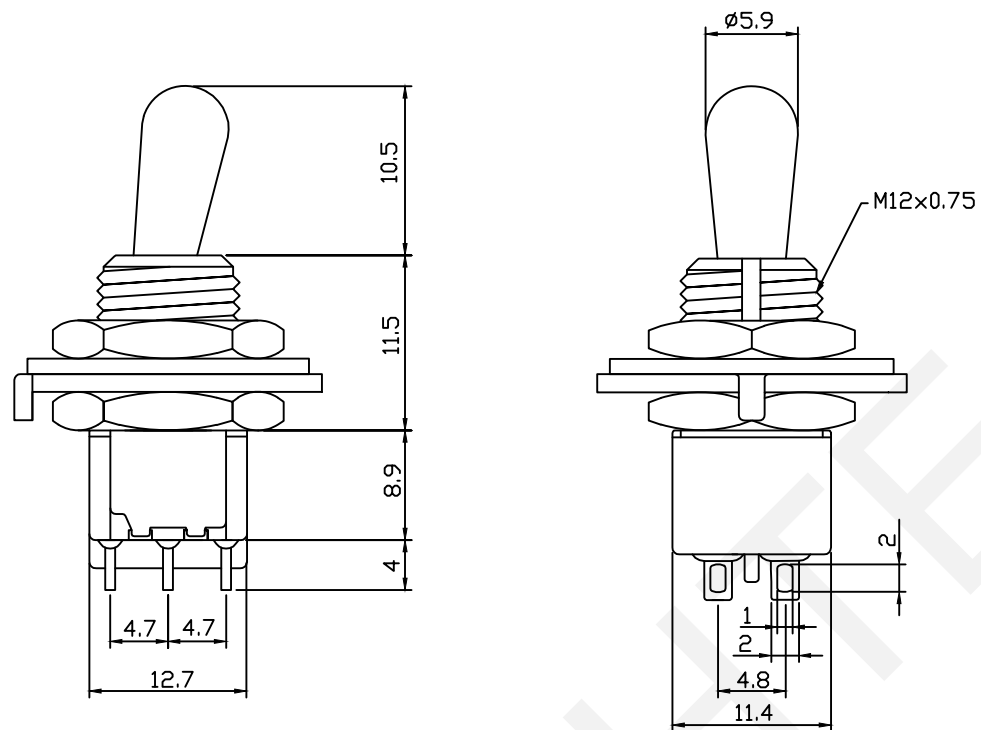


Panel Mounting



Terminal

Notes:

Rating: 2A 250VAC; 5A 125VAC


Contact Resistance: 20mΩ max

Insulation Resistance: 500V DC 1000MΩ Min

Dielectric Strength: 1500V AC 1 Minute

Operating Temperature: -20°C~65°C

Electrical Life :10,000 cycles

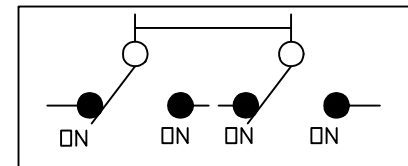

Circuit Diagram

ITEM	SWITCH FUNCTION		
	POS. 1	POS. 2	POS. 3
POSITION			
CONNECTED	ON	NONE	ON
	2-3 5-6		2-1 5-4

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Toggle Switch

THIRD ANGLE PROJECTION



RHTGYS-M12-202-A1