

CIRCUIT

ELECTRICAL

Rating:0.3A 6V DC

Function:1P2T

Timing:Non-Shorting

Contact Resistance:70mΩ Max.

Insulation Resistance:100MΩ Min.at 500V DC

Dielectric Strength: AC 500V For 1Min

Operating Temper:-20°C~75°C

Operating Force:250±150gf



Life Test:10000 Cycles

PACKING:3000PCS/Reel

Order Information:

RHTGYSS-1290BP

SPDT

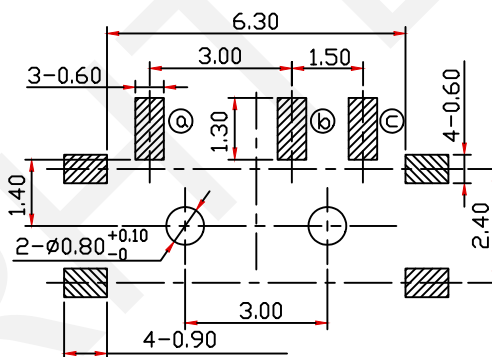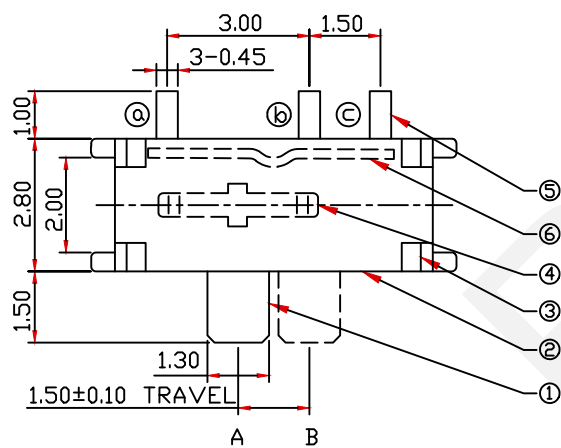

P.C.B LAYOUT

6	STRETCH PIECE	SUS	Natural	1
5	TERMINAL A/B/C	C2680	Ag PLATED	3
4	CONTACT	C5210	Ag PLATED	1
3	BOTTOM	PA46	Black	1
2	COVER	SUS	Ag PLATED	1
1	STEM	PA46	Black	1
NO.	PARTS	MATERIAL	FINISHING&COLOR	Q'TY



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:----

DRWN BY PAN

Mini Slide Switch,6.7x2.8x1.4mm,
SPDT SMD Horizontal

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYSS-1290BP