



1 2 3 4 5 6 7 8 9


A

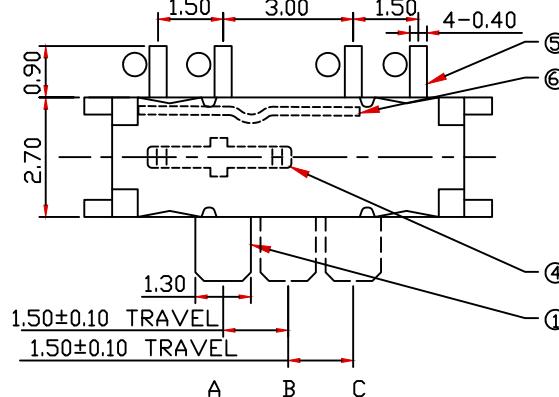




B

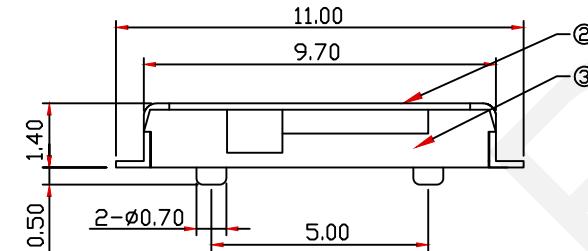

C



D

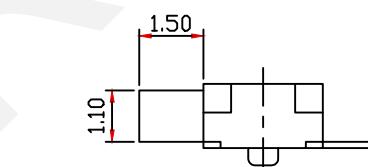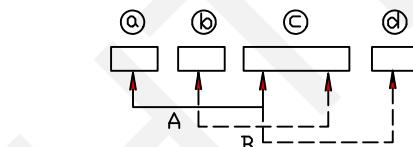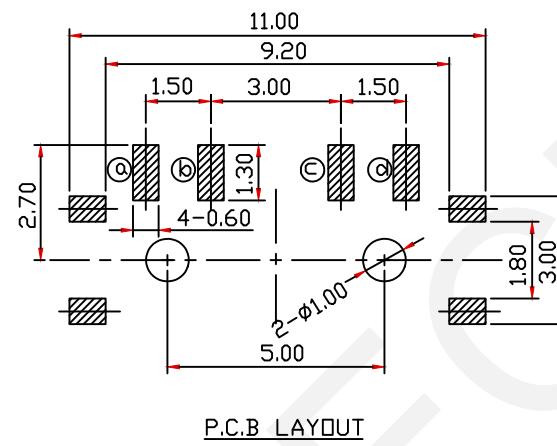

ELECTRICAL

Rating: 0.3A 6V DC

Function: 1P3T

Timing: Non-Shorting

Contact Resistance: 70mΩ Max.

Insulation Resistance: 100MΩ Min. at 500V DC

Dielectric Strength: AC 500V For 1Min

Operating Temp: -20°C~75°C

Operating Force: 250±150gf

Life Test: 10000 Cycles

PACKING: 3000PCS/Reel

Order Information:

RHTGYSS-1300BP

1P3T

6	STRETCH PIECE	SUS	Natural	1
5	TERMINAL a/b/c/d	C2680	Ag PLATED	4
4	CONTACT	C5210	Ag PLATED	1
3	BOTTOM	PA46	Black	1
2	COVER	SUS	Ag PLATED	1
1	STEM	PA46	Black	1
NO.	PARTS	MATERIAL	FINISHING&COLOR	Q'TY



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Mini Slide Switch, 9.7x2.7x1.4mm,
1P3T SMD Horizontal



RHTGYSS-1300BP

1 2 3 4 5 6 7 8 9

G

A

B

C

D

E

F

G